Duoproof

96535762 <DUOPRF 4X28W T16 HF E3 IP65 L840

$T_{p(a)}$	IP65	IK07	⏚	CE	850°C	T_a25

Sealed IP65 recessed emergency luminaires T16

Recessed sealed luminaire with emergency lighting function. IP65. For 4 x 28W Light Source: 4 x T16 / 28W lamp, electronic - fixed output ballast. Electronic control module and battery to provide 3 hour duration emergency lighting. Body fabricated from sheet steel with white powder coated finish. Frame fabricated from mild steel, with welded corners, finished white powder coated. Gasket: silicone. Diffuser panel clear prismatic PET/G, impact resistant and flame retardant (UK Building Regs Part B2 classification TP[a]). Complete with 840 lamp(s).

Dimensions: 1192 x 590 x 90 mm
Luminaire input power: 122 W
Weight: 12.5 kg

TLG_DUOP_F_REC.jpg

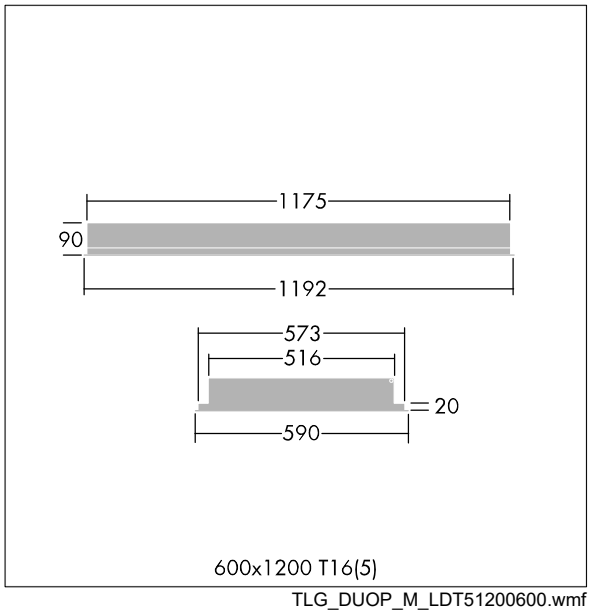

TLG_DUOP_M_LDT51200600.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Duoproof

96535762 <DUOPRF 4X28W T16 HF E3 IP65 L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting