IndiQuattro

96547400 <IQ 2x40W TC-L HF E3 LV L840

IP20 | IK03 | 960°C | T_a25

IndiQuattro

Recessed modular direct/indirect luminaire for 2 x 40W Light Source: 2 x TC-L / 40W lamp(s) with electronic - fixed output and 3 hour manual test emergency lighting circuit. Body and coffer in white painted steel with satinbrite aluminium louvre and micro perforated white painted steel sides. Lay in installation to 15/24mm exposed tee ceilings only. Easy electrical connection via 4 x 2 x 2.5mm² terminal block under external access flap on rear of body. Complete with 840 lamp(s).

Dimensions: 597 x 597 x 70 mm
Luminaire input power: 90 W
Weight: 4.8 kg
Luminaire efficacy: 54 lm/W

TLG_INDQ_F_B2X55WLVRDSB.jpg

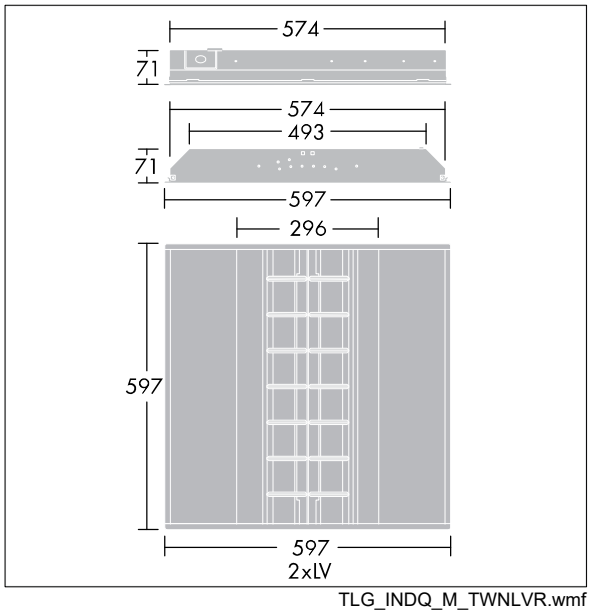

TLG_INDQ_M_TWNLVR.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

IndiQuattro

96547400 <IQ 2x40W TC-L HF E3 LV L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting