IndiQuattro

96550000 <IQ 4x14W T16 HFIX MP L840

	IP20	IK03		CE	960°C	T_a25

IndiQuattro

Recessed modular direct/indirect luminaire for 4 x 14W Light Source: 4 x T16 / 14W lamp(s) with Electronic, DALI dimmable control gear. Body and coffer in white painted steel with micro perforated white painted steel diffuser. Lay in installation to 15/24mm exposed tee ceilings only. Easy electrical connection via 5 x 2 x 2.5mm² terminal block under external access flap on rear of body. Complete with 840 lamp(s).

Dimensions: 597 x 597 x 70 mm
Luminaire input power: 60.5 W
Weight: 4.6 kg

TLG_INDQ_F_B1X55WLVRMP.jpg

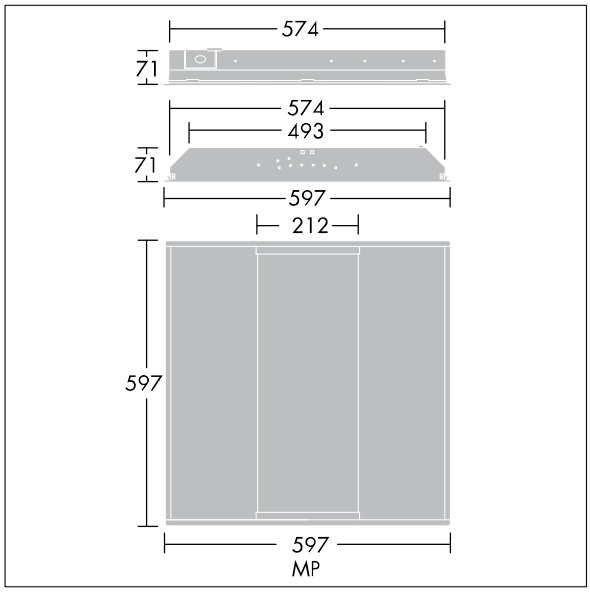

TLG_INDQ_M_MICROPERF.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

IndiQuattro

96550000 <IQ 4x14W T16 HFIX MP L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting