# Duoproof

## 96549178 <DUOPRF 4X28W T16 HFI IP65 L840

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| $T_{p(a)}$ | IP65 | IK07 | ⏚ | CE | 850°C | $T_a$25 | |

## Duoproof

Ceiling recessed sealed luminaire for 4 x 28W Light Source: 4 x T16 / 28W lamp(s). Electronic, DALI / DSI digital dimmable control gear. Body: Fabricated from steel sheet with white powder coated finish. Frame: steel with welded corners and finished in white powder coated. Gasket: silicone. Diffuser panel clear prismatic PET/G. IP65. Impact resistant and flame retardant (UK Building Regulations Part B2 classification TP[a]). Complete with 840 lamp(s).

Dimensions: 1192 x 590 x 90 mm
Luminaire input power: 122 W
Weight: 4 kg

TLG_DUOP_F_REC.jpg

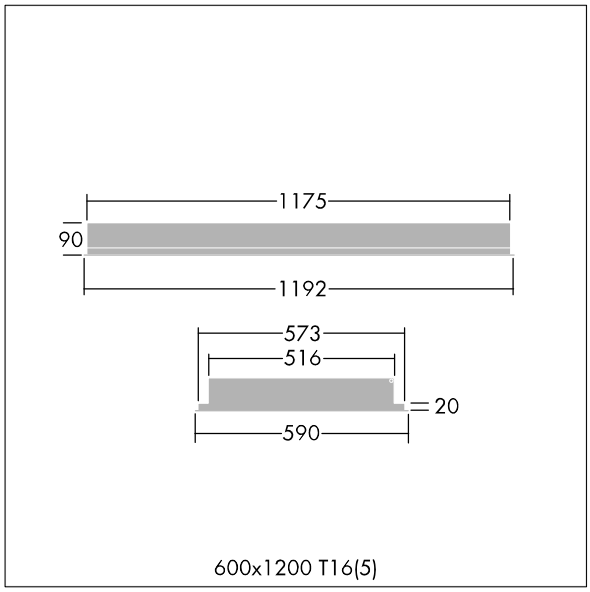


TLG_DUOP_M_LDT51200600.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

# Duoproof

## 96549178 <DUOPRF 4X28W T16 HFI IP65 L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting