96261656 <ISARO 150W HST-DGE CL1 EFL MA60 /L

IP66	IK08	⏚	CE

A road and street lantern, designed for durability, for 1 x 150W Light Source: 1 x HST-MF / 150W lamp. Electronic, fixed output control gear. Class I electrical, IP66, IK08. Body: die-cast aluminium, powder coated grey (RAL9006). Bracket: die-cast aluminium, unpainted. Enclosure: flat glass. Suitable for post top mounting on Ø60mm spigot or side mounting on Ø49-60mm spigot. Variable tilting in 5° steps, post top: 0° to +10°, lateral: -20° to 0°. Cable gland for Ø8 to 12mm cable. Safe access (automatic disconnection) from above to the gear tray and optical system after quick release of the stainless steel front clip. Delivered, ready to install, in a single carton. Complete with lamp.

Luminaire input power: 161 W
Dimensions: 602 x 282 x 146 mm
Weight: 5.35 kg
Scx: 0.063 m²

TLG_ISRO_F_HIDMTPEFLPRO.jpg

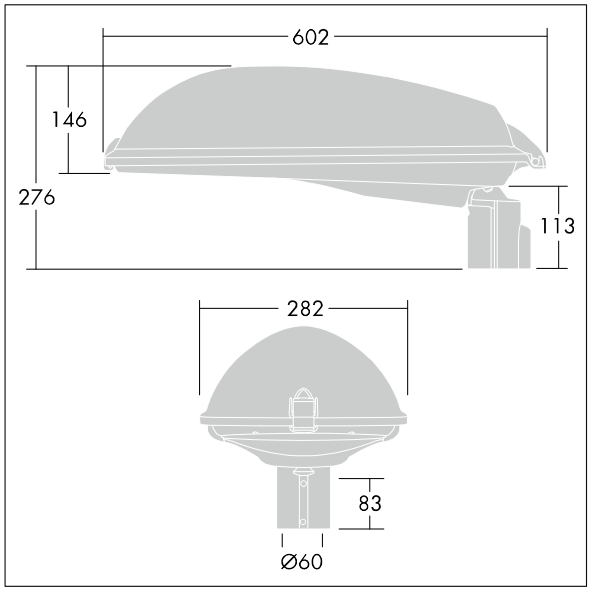

TLG_ISRO_M_HIDFLTG.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96261656 <ISARO 150W HST-DGE CL1 EFL MA60 /L

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting