96261682 <ISARO 45W HIT-DGE CL1 PC PN MA76 /L

IP66	IK10		CE

A road and street lantern, designed for durability, for 1 x 45W Light Source: 1 x CPO-TW / 45W lamp. Electronic, fixed output control gear. Class I electrical, IP66, IK10. Body: die-cast aluminium, powder coated grey (RAL9006). Bracket: die-cast aluminium, unpainted. Enclosure: shallow polycarbonate. Suitable for post top mounting on Ø76mm spigot. Variable tilting in 5° steps, post top: 0° to +10°, lateral: -20° to 0°. Cable gland for Ø8 to 12mm cable. Safe access (automatic disconnection) from above to the gear tray and optical system after quick release of the stainless steel front clip. Delivered, ready to install, in a single carton. Equipped with Nema photocell socket. Complete with lamp.

Luminaire input power: 52 W
Dimensions: 602 x 282 x 195 mm
Weight: 5.54 kg
Scx: 0.069 m²

TLG_ISRO_F_HIDMTPESHPRO.jpg

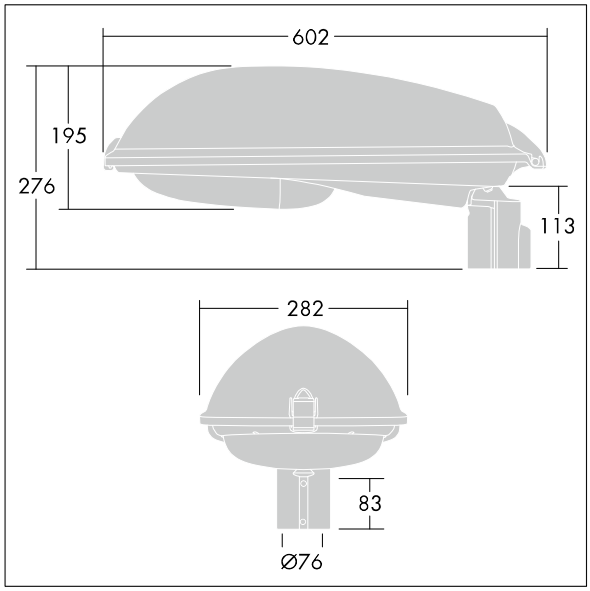

TLG_ISRO_M_HID.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96261682 <ISARO 45W HIT-DGE CL1 PC PN MA76 /L

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting