Omega LED

96241758 <OMEGA LED 1000-830 HFIX E3 MRP

$T_{p(b)}$		IP20 IP44		CE	650°C	T_a 0 +25	

Omega LED

A ceiling recessed LED luminaire with a slim 12mm profile. For pull up installation into plasterboard ceilings. Electronic, DALI dimmable control gear with 3 hour, manual test, LED emergency lighting circuit. Class I electrical, IP44 from below, IP44_IP20 from above, IK02. Body: steel sheet, white (RAL9016). Diffuser: UV-stabilized opal acrylic. Electrical connection via push wire terminal blocks, loop in/loop out possible. Complete with 3000K LED

Dimensions: 300 x 300 x 12 mm
Luminaire input power: 12.3 W
Weight: 3.8 kg

TLG_OMGL_F_SLIM300X300PDB.jpg

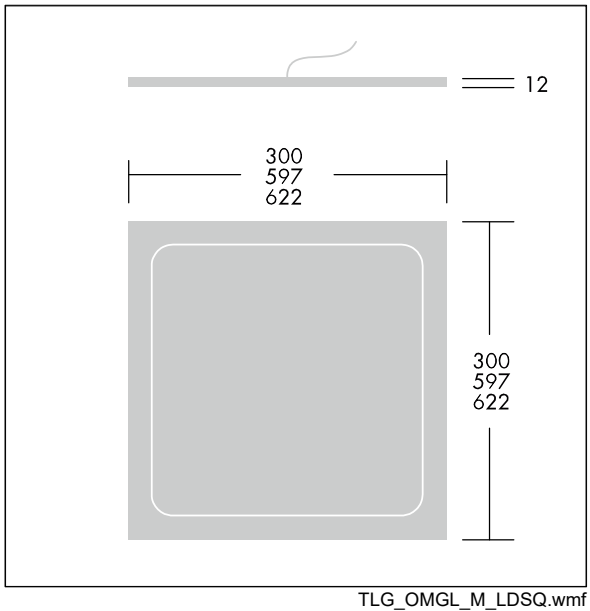

TLG_OMGL_M_LDSQ.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega LED

96241758 <OMEGA LED 1000-830 HFIX E3 MRP

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting