THORN

96550915 JUP3 DI 2X28W T16 HF E3 DSB ML4 L840

IP20	⏚	CE	850°C	T_a 5 25

A slim, lightweight, suspended luminaire in a simple, practical and robust design with direct/indirect distribution. for 2 x 28W Light Source: 2 x T16 / 28W lamp(s). Body: steel sheet, painted white (close to RAL 9010). Endcaps: moulded white polycarbonate. Optic: satinbrite anodised aluminium louvre. Class I electrical, IP20. Electrical connection via pre-fitted LSOH white mains cable. Self balancing, may be mounted individually or in continuous lines. Complete with 840 lamp(s).

To suspend Direct distribution versions you must order suspension wire kit 96241826 separately. This is included in the Direct/Indirect versions.

Dimensions: 1276 x 219 x 46 mm
Luminaire input power: 64 W
weight: 4.64 kg

TLG_JUP3_F_DITWINDSBE3PDB.jpg

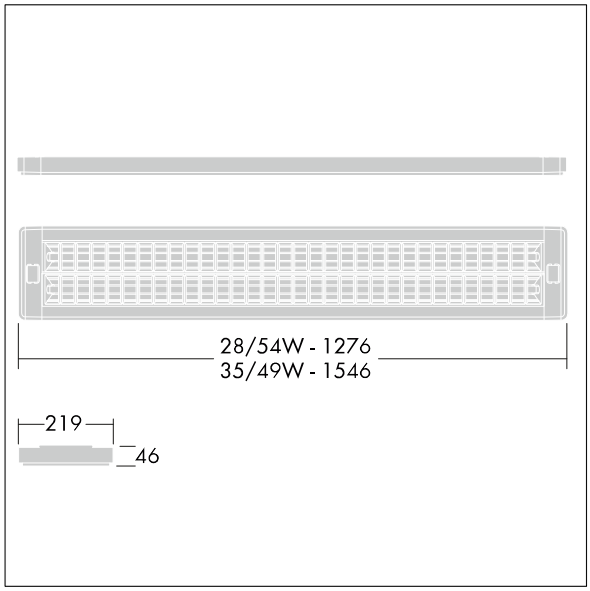

TLG_JUP3_M_LDTWIN.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting