THORN

# 96265002 <SATIN2 MWA L330 12L35 A/S GN IN

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| IP67 | IK08 | | CE | | | 850°C | $T_a$25 | |

A discreet linear floodlight for façade illumination applications. 12 LEDs driven at 350mA with asymmetrical distribution. Electronic, fixed output control gear. Body: extruded aluminium (EN AW-6060 T6) painted textured silver grey. Sides: grey polycarbonate. Enclosure: UV stabilised polycarbonate. Stirrups: powder coated steel. Class II electrical (this product is not earthed), IP67, IK08. Surface mounted or recessed with optional ground recessed box. Pre-wired with 1m of 2x1mm² H05RNF cable (and 1m of DMX512 cable for DMX versions) at one end. Complete with green LED

Dimensions: 332 x 75 x 70 mm
Luminaire input power: 14 W
Weight: 1.3 kg

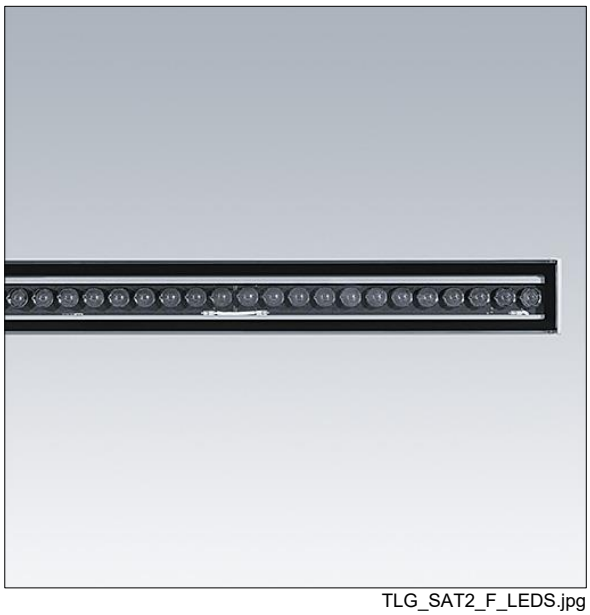

TLG_SAT2_F_LEDS.jpg

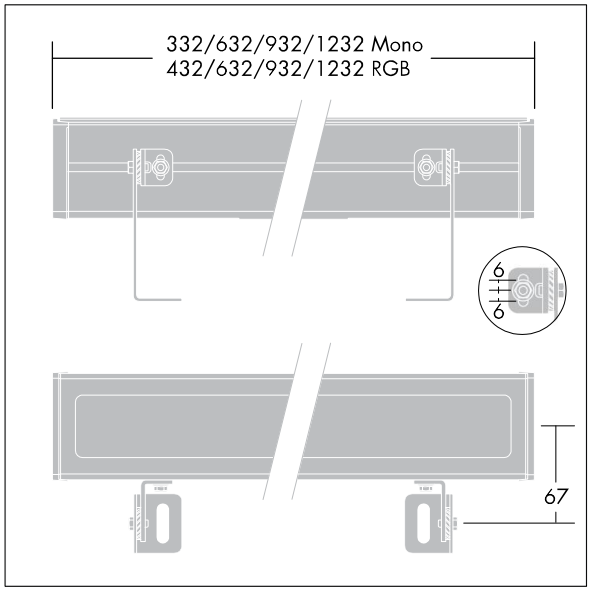


TLG_SAT2_M_LD1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

**96265002 <SATIN2 MWA L330 12L35 A/S GN IN**

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting