96264340 CESAR RECT 6L70 2WD 840

IP65 | IK06 | T_a25

Compact LED cuboid floodlight. Electronic, fixed output control gear. Class I electrical, IP65, IK06. Body: die-cast aluminium painted grey. Front cover: 4mm thick tempered glass. Fixing plate: polycarbonate. Electrical connection via 2 pole terminal block. Complete with 4000K LED

Dimensions: 265 x 100 x 110 mm
Luminaire input power: 17 W
Weight: 2.2 kg

TLG_AXYL_F_RECT2WD.jpg

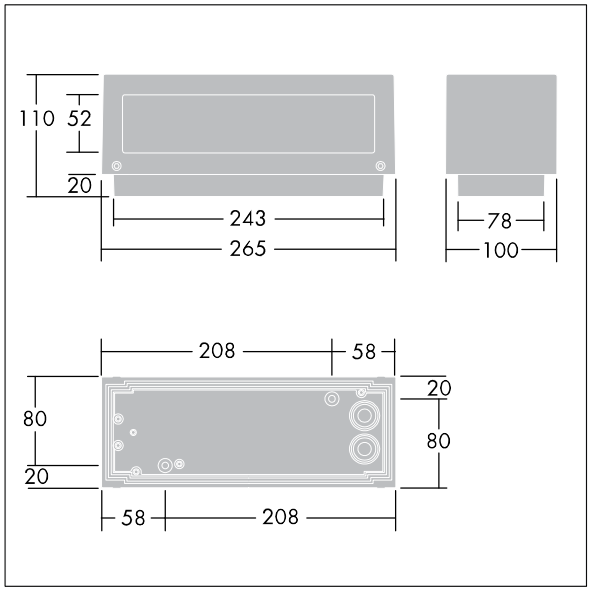

TLG_AXYL_M_LDRECT1.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

96264340 CESAR RECT 6L70 2WD 840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting