THORN

96642362 <CHAL PRO LED1100-830 HF E3 RMB W6

	IP20 IP54	IK03		CE			850°C	T_a25	

A recessed LED downlight. Remote fixed output control gear with 3 hour, manual test, emergency lighting circuit. IP54 (IP20 from above), Class I electrical. Body: aluminium, painted. Reflector: mirrorbrite. Suitable for mounting in ceiling thicknesses of 1-40mm in a Ø150mm cut-out. Complete with 3000K LED.

Dimensions: Ø172 x 94 mm
Luminaire input power: 8.8 W
Luminaire luminous flux: 1090 lm
Luminaire efficacy: 124 lm/W
Weight: 1.51 kg

TLG_CHLP_F_RMBPDB.jpg

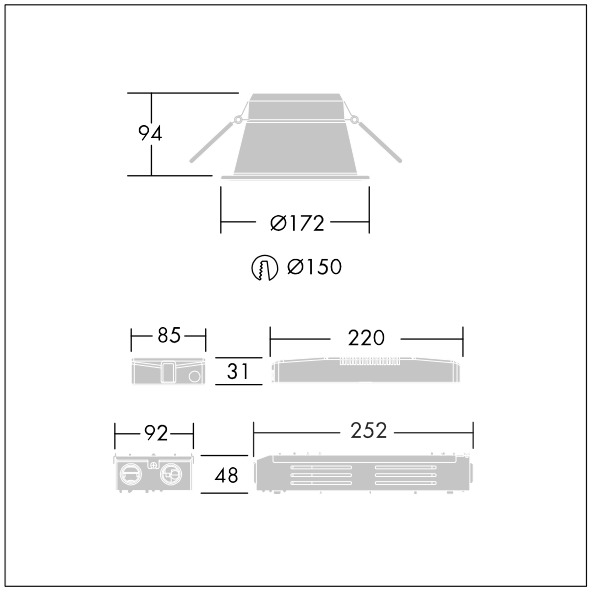

TLG_CHLP_M_EM.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

96642362 <CHAL PRO LED1100-830 HF E3 RMB W6

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting