Mica

96271531 MICA SLIM SS 1L35 ACC 24D 840 AL SF

IP67 | IK10

Mica

A small, shallow, round ground recessed luminaire. 1 LED (s) driven at 350mA by integral driver. 24° beam angle for driveover illumination applications. Tilting angle adjustment of ±15°. Body: die-cast aluminium with powdered paint finish. Frame: painted aluminium, 3mm thick. Front glass: semi-frosted toughened glass, mm thick, surface temperature complies with EN60598-2-13. Pre-wired with 0.5m cable. Recessing box: polypropylene. Rated IP67, class I electrical. Maximum static load 3500kg. Complete with 4000K LED

Mica and Mica Slim can be installed in areas with a maximum low speed of 30km/h for the flat versions and 20km/h for the dome versions.

Dimensions: Ø103 x 175 mm
Luminaire input power: 2.5 W
Luminaire luminous flux: 92 lm
Luminaire efficacy: 37 lm/W
Weight: 1.57 kg

TLG_MICA_F_SSS1LEDALSF.jpg

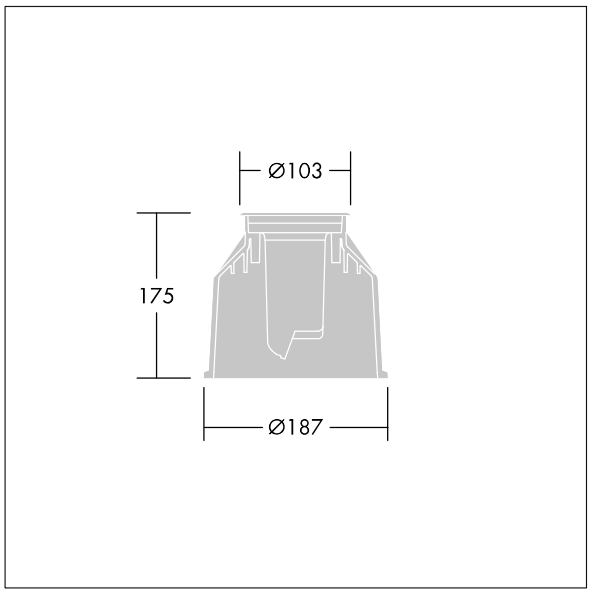

TLG_MICA_M_2015LDSLMSSAL.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Mica

96271531 MICA SLIM SS 1L35 ACC 24D 840 AL SF

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting