CorrosionForce

96627913 CORRF2 LED7000 AC HF L840

IP65	D	IK02	⏚	CE	650°C	Ta -20 +25

CorrosionForce

A high performance IP65 dust and moisture resistant luminaire for aggressive atmospheres. Electronic, fixed output control gear. Class I electrical. Canopy in light grey glass fibre reinforced polyester. Unique internal light chamber diffuses LED visibility and shapes the light distribution. Diffuser in acrylic with internal prisms. For surface or suspended mounting. Quick-fix installation brackets are supplied for surface mounting, optional accessory kits are available to help with other mounting options. Complete with 4000K LED

Dimensions: 1594 x 112 x 112 mm
Luminaire input power: 56 W
Weight: 2 kg
Luminaire efficacy: 121 lm/W

TLG_XFRC_F_LEDPDBDIFF.jpg

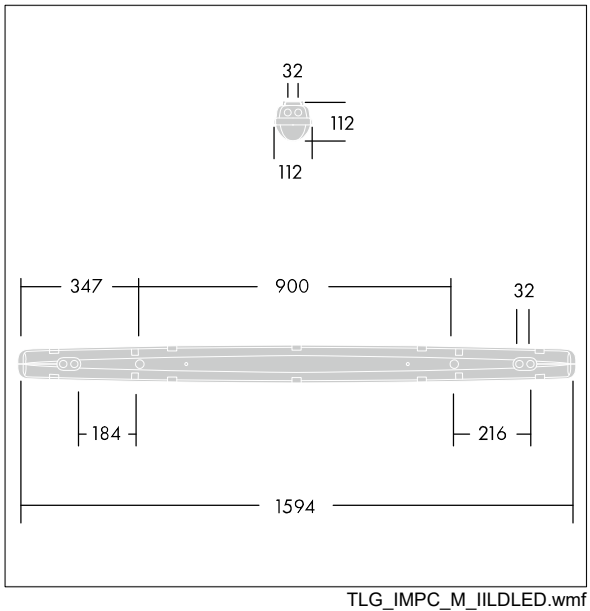

TLG_IMPC_M_IILDLED.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting