HiPak Pro

96628085 <HIPAK PRO IP66 LED13500-740 HFI-X E3 WD

IP66 | D | IK08 | ⏚ | CE | T_a 0 +30

HiPak Pro

A LED High Bay luminaire with wide distribution. Electronic, DALI dimmable control gear with 3 hour, manual test, LED emergency lighting circuit. Class I electrical, IP66, IK08. Housing: anodised aluminium extrusion. End caps: die-cast aluminium (close to RAL 9006). Reflector: high grade aluminium. Front cover: polycarbonate in steel frame. Mounting kits to be ordered separately. Electrical connection via pre-fitted 2m x 6 x 1.5mm² grey cable. Complete with 4000K LED.

Dimensions: 802 x 294 x 97 mm
Luminaire input power: 104 W
Weight: 14.3 kg

TLG_HIPP_F_LEDIP66PDB.jpg

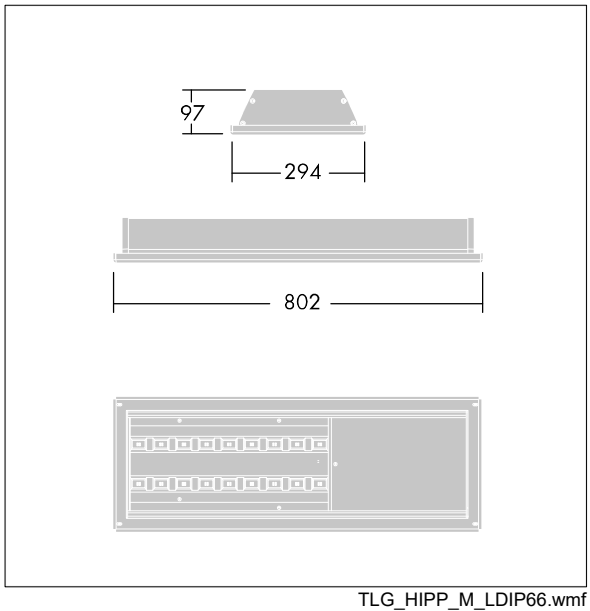

TLG_HIPP_M_LDIP66.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

HiPak Pro

96628085 <HIPAK PRO IP66 LED13500-740 HFI-X E3 WD

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting