# HiPak Pro

## 96665230 <HIPAK PRO IP40 LED18500-740 HFIS-X E3 R

IP40 | D | IK07 | Ta 0 +35

## HiPak Pro

A LED High Bay luminaire with rack distribution. Electronic, DALI dimmable control gear with 3 hour, manual test, LED emergency lighting circuit. Class I electrical, IP40, IK07. Housing: anodised aluminium extrusion. End caps: painted steel (close to RAL 9006). Reflector: high grade aluminium. Front cover: plastic.  Mounting kits to be ordered separately. Electrical connection via piano key terminal block behind sliding cover. Equipped with daylight and presence detection for dimming control. Complete with 4000K LED.

Dimensions: 756 x 271 x 92 mm
Luminaire input power: 152 W
Weight: 5.2 kg

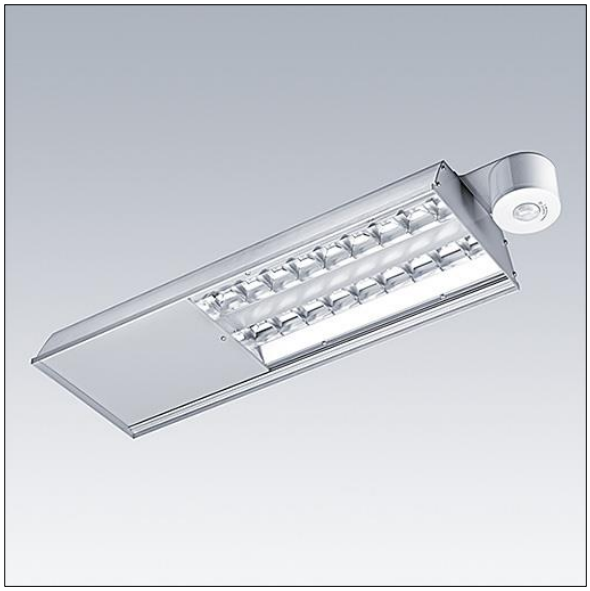

TLG_HIPP_F_LEDSNSPDB.jpg

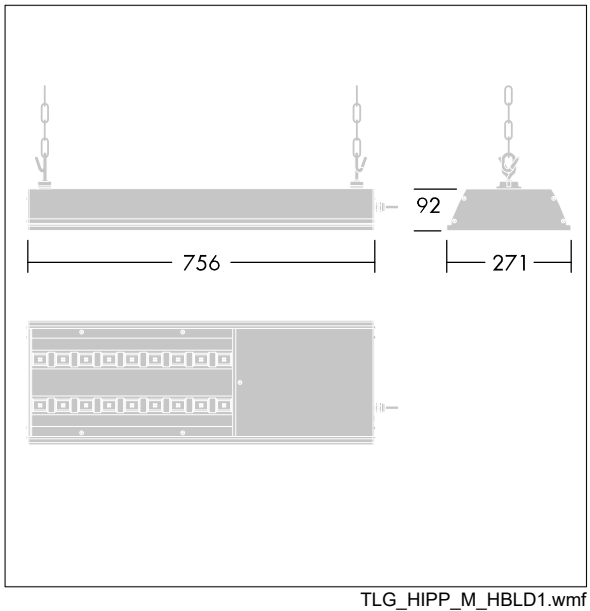


TLG_HIPP_M_HBLD1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime.  International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

# HiPak Pro

## 96665230 <HIPAK PRO IP40 LED18500-740 HFIS-X E3 R

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting