THORN

96628368 <PRIM L3 LED19000-840 WB HFIX E3 SET

IP20 | halogen | IK02 | CE

3000 mm length of trunking, for direct ceiling fixing or suspended mounting on wire or chains, with 19,000 lm LED luminaire with wide distribution.. Roll-formed steel sheet in Polyester lacquered finish. Class I electrical, IP20. Standard module, with mechanical connector. Supplied with plug-in, 7-pole through wiring. Complete with side panels. Complete with 4000K LED.

Dimensions: 3000 x 68 x 93 mm
Luminaire input power: 127 W
Luminaire luminous flux: 19000 lm
Luminaire efficacy: 150 lm/W
Weight: 8.9 kg

TLG_PMM5_F_LEDPDB.jpg

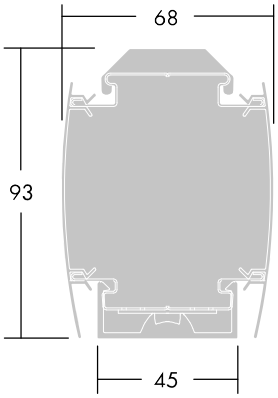

L2000: L = 2000mm
L3000: L = 3000mm

TLG_PMML_M_LED_bestueckt.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

96628368 <PRIM L3 LED19000-840 WB HFIX E3 SET

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting