Leopard

96631157 <LEOPARD 1900 LED3 E3 OP RD WH L840

IP65	IK10		CE	850°C	Ta 0 +25

Leopard

A round bulkhead LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body: white polycarbonate. Diffuser: opal polycarbonate. Class I electrical, IP65. Complete with 4000K LED

Dimensions: Ø300 x 101 mm
Luminaire input power: 19 W
Weight: 1.7 kg

TLG_LPRD_F_LRWO.jpg

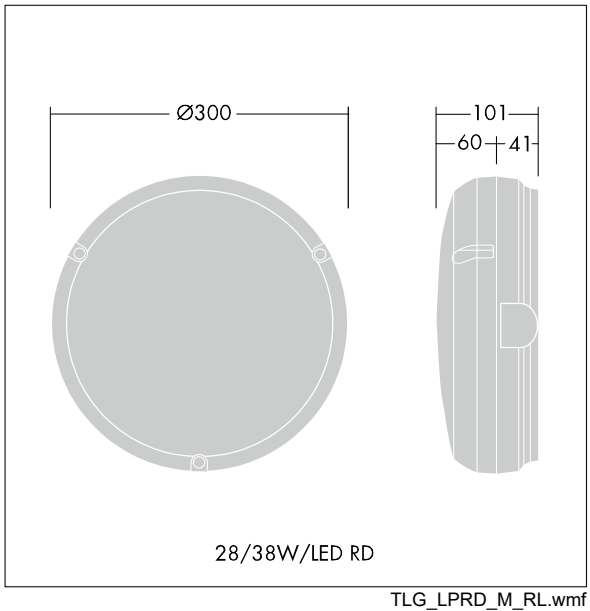

TLG_LPRD_M_RL.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting