THORN

96200467 <PETRELUX ExEn 2x36w T26 HF

IP65 | 850°C | 4Nm | T_a30

ATEX Category 3 Certificated type EE xn linear fluorescent luminaire for use in hazardous locations

Zone 2 (ATEX Cat 3) flourescent luminaire for 2 x 36 Light Source: 2 x T26 / 36W lamps. Integral high frequency electronic ballast. Body compression moulded glass reinforced polyester (GRP), light grey colour. Enclosure injection moulded prismatic clear, UV stabilised, polycarbonate. Enclosure retained to body by stainless steel toggle clips. IP65 to IEC529. Certification code EE xn 11 T4

Dimensions 1312 x 172 x 108mm

Luminaire input power: 71 W

Weight: 4.1 kg

TLG_PTLX_F_EXE.jpg

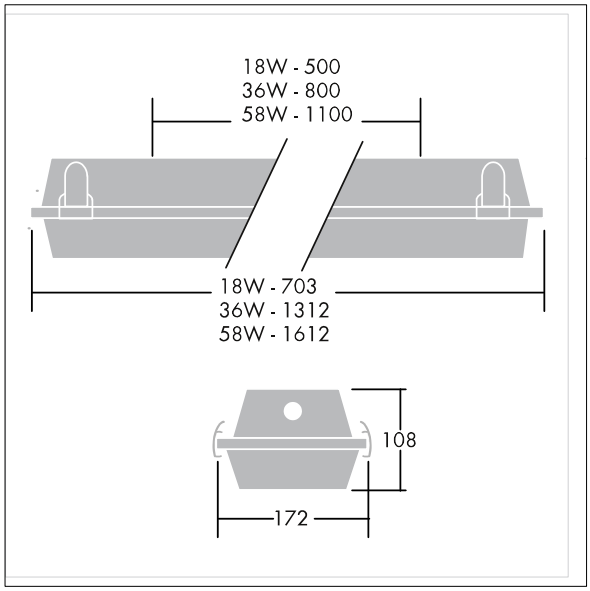

TLG_PTLX_M_EXEN.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting