Discontinued

96107850 <D-CO LED DL 6x1,2W 4K 24° 230V WHI

IP20 | CE | LED

Discontinued

An LED downlight with 6 x 1.2W LEDs, as a 35W halogen replacement, complete with 8W for direct mains connection, connected by 700mm halogen-free cable. Tiltable by 20°. Manufactured from aluminium, painted white. Suitable for ceiling thicknesses 1-22mm with a minimum void depth of 75mm, cut-out Ø90mm. Class II electrical. IP20. Complete with 4000K LED, beam angle 24°.

Dimensions: Ø98 x 78 mm
Luminaire input power: 9.7 W
Weight: 0.28 kg

TLG_DCOL_F_DL6LEDW_1.jpg

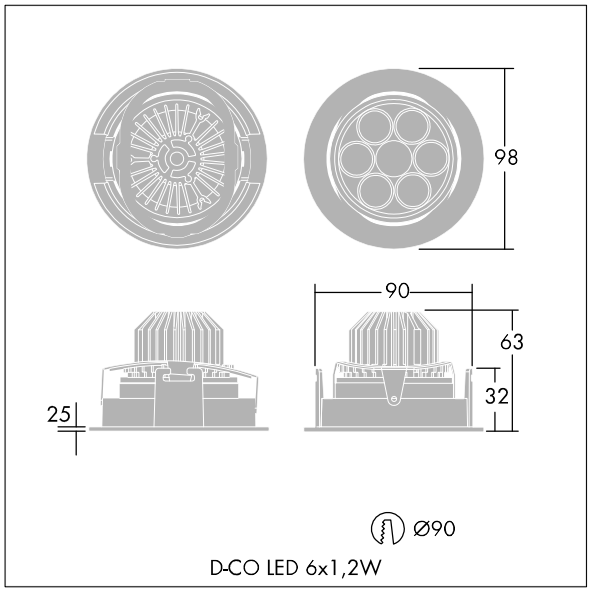

TLG_DCOL_M_LDDL6LEDS.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96107850 <D-CO LED DL 6x1,2W 4K 24° 230V WHI

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting