Punch II T8

96536272 <PUNCH II 4X18W T26 HF DMB E3 L840

IP20	IK07		CE	960°C	T_a 5 25

Punch II T8

A slim surface mounted and suspended luminaire with modern aesthetics for 4 x 18W Light Source: 4 x T26 / 18W lamp(s). Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body in white painted steel sheet with white polycarbonate end caps and double parabolic mirrorbrite aluminium louvre. Class I electrical, IP20. Electrical connection via 4 x 2 x 1.5mm² piano key terminal block. Suspension kits to be ordered separately if required. Complete with 840 lamp(s).

Dimensions: 640 x 640 x 70 mm
Luminaire input power: 79 W
Weight: 3.5 kg

TLG_PNCH_F_24X18DMB.jpg

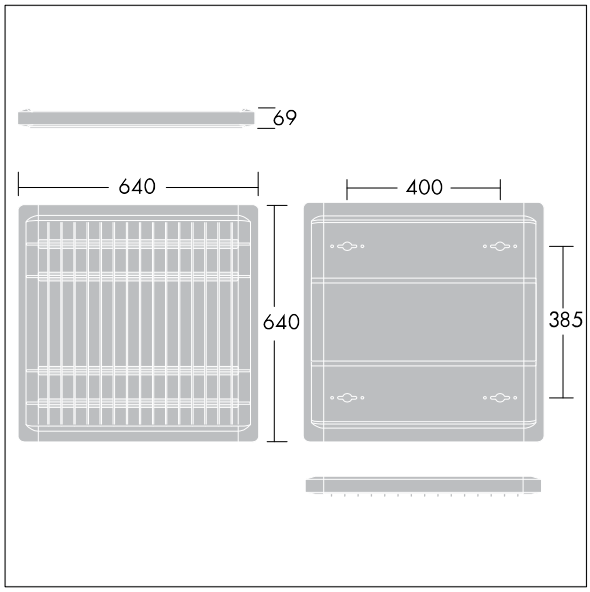

TLG_PNCH_M_LD4LAMP.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Punch II T8

96536272 <PUNCH II 4X18W T26 HF DMB E3 L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting