Discontinued

96547206 <ORACLE 2W 250W HST 240V CL1 GL PM/L

IP66	IK08	⏚	CE

Discontinued

Discontinued is a road lighting lantern with IP66 optical and gear compartment, SC1 class, suitable for a wide range of different applications. Its light grey aluminium body, curved glass enclosure, and high quality materials ensure durability and recyclability.
The luminaire can be side entry (up to 60mm) and post-top (up to 76mm) mounted through an integral rotating spigot and it can be fixed with 2 screws and bolts to secure the initial position.
The optibloc system with wide concept for 250W Light Source: 1 x HST-MF / 250W lamp and equipped with a magnetic ballast delivers uniform lighting distribution precisely where it is needed according to the application and lighting standards (EN 13201).
Oracle resolves the major issue of the Energy resources and offers the perfect solution reducing the Energy costs: complete minicell

Dimensions: 813 x 395 x 254 mm
Luminaire input power: 280 W

TLG_ORCL_F_27MN.jpg

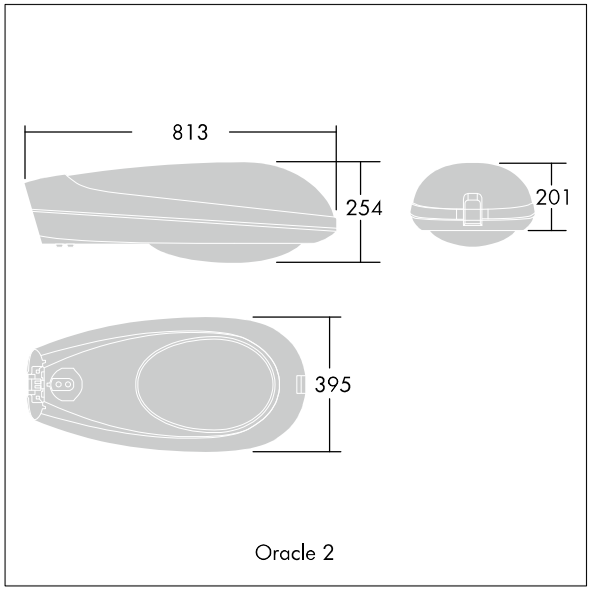

TLG_ORCL_M_LD2.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting