Discontinued

96535856 <COLLEGE 1X58W HF E3 PC CL L840

IP44	IK05		CE	850°C

Discontinued

High performance IP44 surface mounted fluorescent luminaire for 1 x 58W Light Source: 1 x T26 / 58W lamp(s) with Electronic, circuit and 3 hour, manual test, emergency lighting circuit. Body in white painted steel, endcaps in white polycarbonate with a curved, precision extruded clear prismatic polycarbonate diffuser. Ø21.5mm cable entry hole in the centre of the back spine with optional cable entry through each end cap. Fitting supplied with sealing grommets and innovative "quick fix" horseshoe and sliding washers for direct screw fixing to surface, fixing centres 1500mm. Standard BESA fixings. Can be suspended using wire suspension accessory kit (to be ordered separately). Easy to remove gear cover to protect and cover all components. 5 x 2 x 2,5mm² piano key terminal block. Complete with 840 lamp(s).

Dimensions: 1571 x 217 x 90 mm
Luminaire input power: 56.2 W
Weight: 6.3 kg

TLG_CLLG_F_P1.jpg

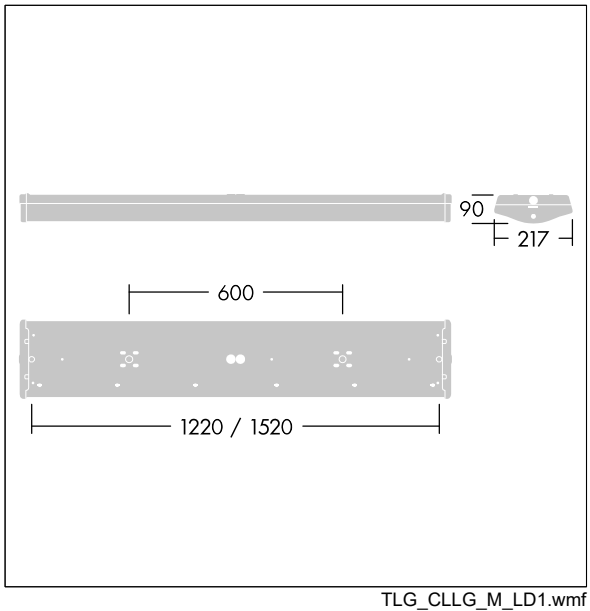

TLG_CLLG_M_LD1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96535856 <COLLEGE 1X58W HF E3 PC CL L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting