Discontinued

96547385 <PUNCH II DI 2X49W T16 HF DMB E3 LI840

IP20	IK07	⏚	CE	960°C	T_a 5 25

Discontinued

A slim suspended direct/indirect luminaire with modern aesthetics for 2 x 49W Light Source: 2 x T16 / 49W lamp (s). Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body in white painted steel sheet with white polycarbonate end caps and double parabolic mirrorbrite aluminium louvre. Class I electrical, IP20. Electrical connection via 4 x 2 x 1.5mm² piano key terminal block. Suspension kits to be ordered separately if required. Complete with 840 lamp(s).

Dimensions: 1620 x 256 x 70 mm
Luminaire input power: 112 W
Weight: 7.3 kg

TLG_PNCH_F_22X36DMB.jpg

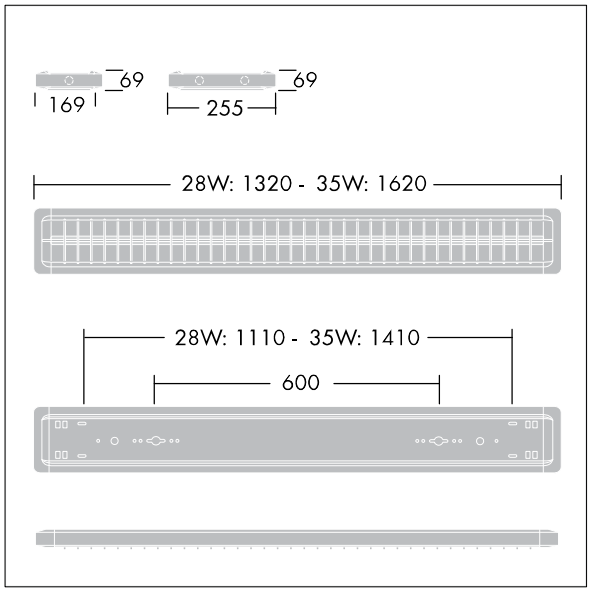

TLG_PNCH_M_LDIIT5.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96547385 <PUNCH II DI 2X49W T16 HF DMB E3 LI840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting