PopPack Pro battens and modules

96548074 <POPPACK PRO 2X49W T16 HF L840

IP20		CE	850°C	T_a25

PopPack Pro battens and modules

A classic batten luminaire for 2 x 49W Light Source: 2 x T16 / 49W lamp(s) with electronic - fixed output ballast. IP20, Class I electrical. Batten: white, pre-coated rolled form steel. Endcaps/lamp holders: injection moulded white polycarbonate. Mounting plates (FixExpress): injection moulded polycarbonate. 600mm fixing centres. Electrical connection via 4 x 2.5mm² terminal block, all internal wiring is halogen free. Sensor (SaveExpress) and emergency (SafeExpress) modules push fit on either end after the end caps have been removed and are connected with 'one-way' plugs and sockets. All attachments are installed without the need for any tools. Complete with 840 lamp(s).

Dimensions: 1490 x 80 x 85 mm
Luminaire input power: 107 W
Weight: 1.4 kg

TLG_POPP_F_CLASST52X28.jpg

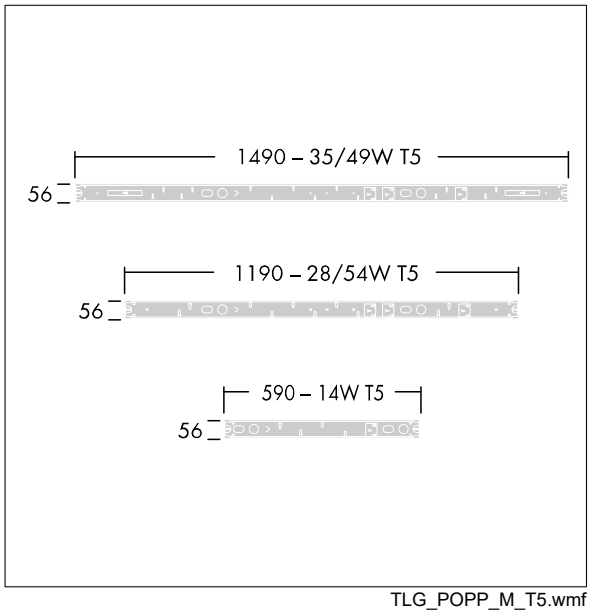

TLG_POPP_M_T5.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

PopPack Pro battens and modules

96548074 <POPPACK PRO 2X49W T16 HF L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting