96548983 <VOYAGER C LED AREA MCE E3TX SIL

IP40

High performance, surface mounted, 3 hour SelfTest or Addressable Test if connected to Explorer Project/Vision, emergency lighting luminaire for 1 x 3W LED with open area optic. Housing manufactured from die-cast aluminium, powder coated silver. Class I electrical, ingress protection rated IP40. Electrical connection via 2 x 6 x 2.5mm² piano key terminals. Gear and NiMH batteries mounted in body. Two Ø14mm knock-outs on one side to accomodate surface wiring. Suitable for mounting heights up to 7m. Can be operated in either maintained or non-maintained modes.

Luminaire input power: 5.4 W
Dimensions: 146 x 146 x 37 mm
Weight: 0.9 kg

TLG_VYLD_F_AMCESIL.jpg

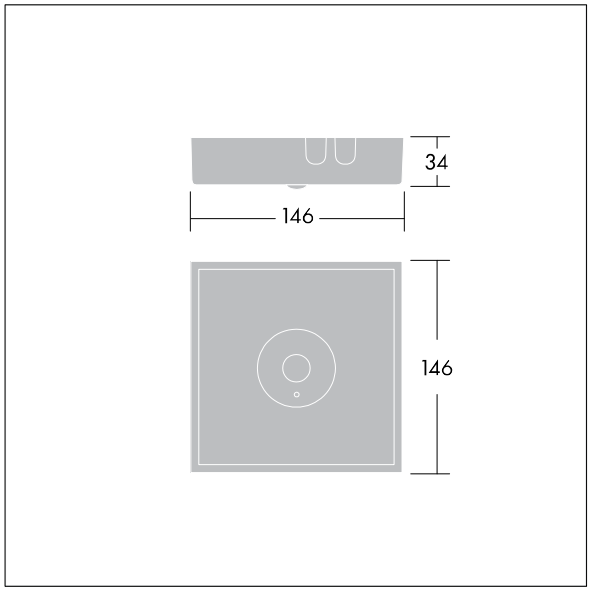

TLG_VYLD_M_MCE AREA.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96548983 <VOYAGER C LED AREA MCE E3TX SIL

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting