Discontinued

96550020 <MENLO3S 1X54W HFI E3 AC OP L840

IP20	⏚	CE	650°C	$T_{a\ 25}^{5}$

Discontinued

A shallow bodied surface mounted luminaire for 1 x 54W Light Source: 1 x T16 / 54W lamp(s). Electronic, DALI / DSI digital dimmable control gear with 3 hour, manual test, LED emergency lighting circuit. Body: deep drawn steel, pre-painted white. Light chamber and wings made from extruded acrylic, end-caps in die-cast aluminium, powder coated silver. Central diffuser of opal acrylic. Suitable for surface mounting onto solid ceiling. Can also be integrated into 300x1200mm suspended ceiling grids using suspended mounting kit (to be ordered separately). Electrical connection via push wire terminal block. Supplied fully assembled with protective film for quick, easy and clean installation. Complete with 840 lamp(s).

Dimensions: 1230 x 415 x 100 mm
Luminaire input power: 58 W
Weight: 7.5 kg

TLG_MNLO_F_3MCEDIFF3.jpg

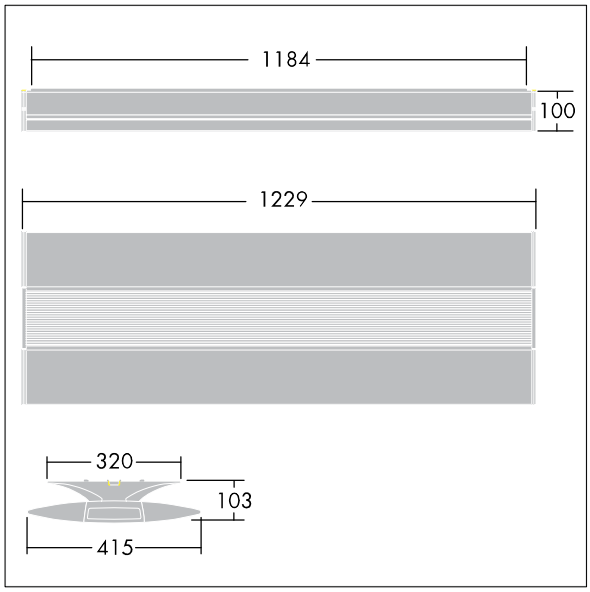

TLG_MNLO_M_3MCE.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96550020 <MENLO3S 1X54W HFI E3 AC OP L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting