Quattro T5

96549528 <QUATROT5 4X14W T16 HFIX WL6 DSB AH L840

IP20		CE	850°C	T_a25

Recessed, modular, luminaires, with air handling facility, for exposed grid and concealed fix ceilings. Louvre Mirrorbrite 200cd/m2 or Satinbrite 1000cd/m2 at 65 degrees

Recessed modular luminaire, with air handling facility, for 4 x 14W Light Source: 4 x T16 / 14W lamps with Electronic, circuit DALI dimmable control gear. Body in white painted steel. Louvre in satinbrite aluminium with white micro perforated infill panels. Lays into most exposed grid ceiling systems and can be installed into concealed fix ceilings with mini-wedge suspension brackets (supplied). Electrical connection via factory fitted 6 pole GST "T" connector. Complete with 840 lamp(s)..

Dimensions: 597 x 597 x 59 mm
Luminaire input power: 60.5 W
Weight: 5.2 kg

TLG_QRT5_F_MB.jpg

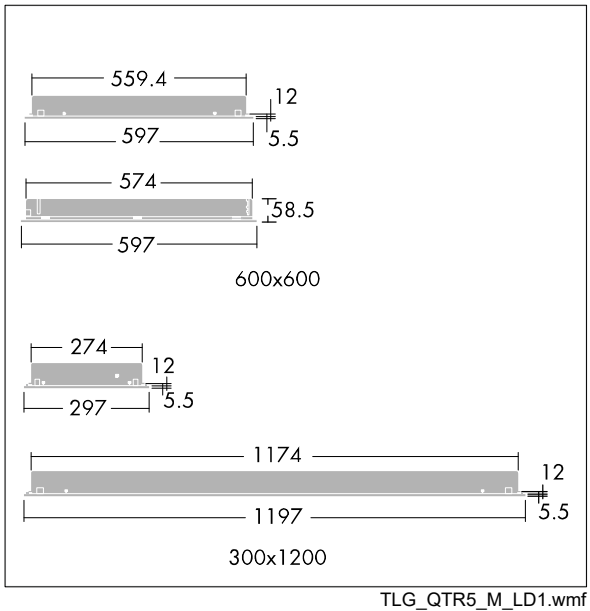

TLG_QTR5_M_LD1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Quattro T5

96549528 <QUATROT5 4X14W T16 HFIX WL6 DSB AH L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting