Quattro T5

96549531 <QUATROT5 4X14 T16HFIX E3 WL6 DSB AH L84

IP20 | 850°C | T_a25

Recessed, modular, luminaires, with air handling and emergency lighting facility, for exposed grid and concealed fix ceilings. Louvre Mirrorbrite 200cd/m2 or Satinbrite 1000cd/m2 at 65 degrees

Recessed modular luminaire, with air handling facility and emergency lighting function, for 4 x 14W Light Source: 4 x T16 / 14W lamps. With Electronic, circuit DALI dimmable control gear and with 3 hour, manual test, emergency lighting circuit emergency operation. White painted steel body with satinbrite aluminium louvre and white infill panels. Lays into most exposed grid ceiling systems and can be installed into concealed fix ceilings using "wedge" suspension brackets (supplied). Complete with 840 lamp.

Dimensions 597 x 597 x 59mm

Luminaire input power: 60.5 W

Weight: 5.25 kg

TLG_QRT5_F_MB.jpg

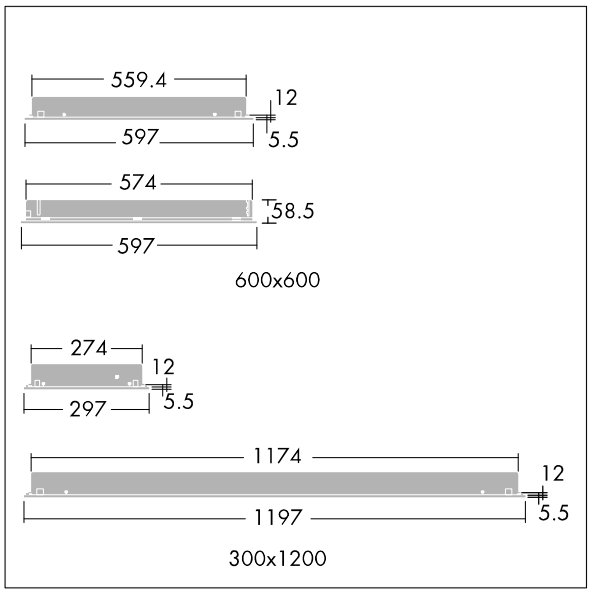

TLG_QTR5_M_LD1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Quattro T5

96549531 <QUATROT5 4X14 T16HFIX E3 WL6 DSB AH L84

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting