Discontinued

96549198 <HI-RACK 4X49W HFSI E3 WD L840 PC COVER

IP20	IK07		CE	850°C	T_a 5 25

Discontinued

Fluorescent high bay suspended luminaire. For 4 x 49W Light Source: 4 x T16 / 49W lamp(s). Electronic, DALI / DSI digital dimmable control gear with 3 hour, manual test, emergency lighting circuit. Body: Pre-coated steel with polycarbonate endcaps. Reflector optic: satinbrite aluminium with a wide lighting distribution and a UV stable polycarbonate cover. IP20. Electrical connection via 4 x 2 x 2.5mm² external Isodome Piano Key terminal block. For lighting trunking mounting via 20mm holes or rod mounting via 10mm holes, accessory kit 96535235 is required. For Canalis trunking accessory kit 96239583 is required. For wire suspension accessory kit 96535236 is required. Equipped with daylight and presence detection for dimming control. Complete with 840 lamp(s).

Dimensions: 1670 x 390 x 200 mm
Luminaire input power: 212 W
Weight: 12 kg

TLG_HIRK_F_PDBSENS.jpg

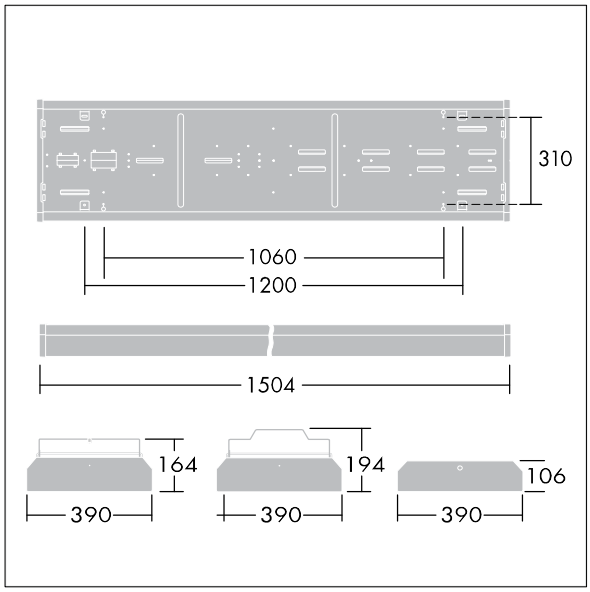

TLG_HIRK_M_LD1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96549198 <HI-RACK 4X49W HFSI E3 WD L840 PC COVER

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting