Omega 2 T5

96549313 <OMEGA2 FAST 4x14 T16 HFIX E3 IS DSB L84

IP20 | 960°C | T_a 5 25

Omega 2 T5

Recessed modular luminaire for 4 x 14W Light Source: 4 x T16 / 14W lamps. Electronic, DALI dimmable control gear with 3 hour, manual test, emergency lighting circuit. Body: white painted steel with double parabolic aluminium louvre. For exposed tee grid 15 or 24mm, concealed grid with height 12 - 65mm (using wedge brackets) or plasterboard (using wedge brackets). Class I electrical, IP20. Electrical connection via factory fitted 6 x 2 x 1.5mm² piano key terminal block located on a hatch cut into the side of the body, allowing external access. Complete with 840 lamp (s).

Dimensions: 597 x 597 x 59 mm
Luminaire input power: 60.5 W
Weight: 4.1 kg

TLG_OMGA_F_2T5DSB2.jpg

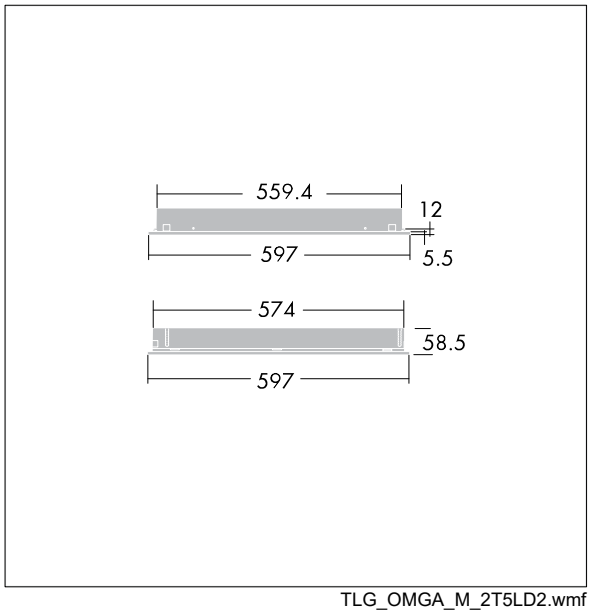

TLG_OMGA_M_2T5LD2.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting