Equaline LED

96241525 <EQUALINE LED 3200 HFI MPT MCE/-

IP20 halogen

Equaline LED

Single length surface mounted individual direct LED luminaire, with a seamless rectangular shape. Electronic, DALI / DSI digital dimmable control gear. Class I electrical, IP20. Body: extruded anodised aluminium. End caps: aluminium die casting alloy, powder coated grey. Diffuser:acrylic. Electrical connection via 2.5m halogen free grey cable 5 x 0.75mm². Supplied with dedicated surface mounting brackets.

Dimensions: 1270 x 72 x 85 mm
Luminaire input power: 40 W
Weight: 5.7 kg

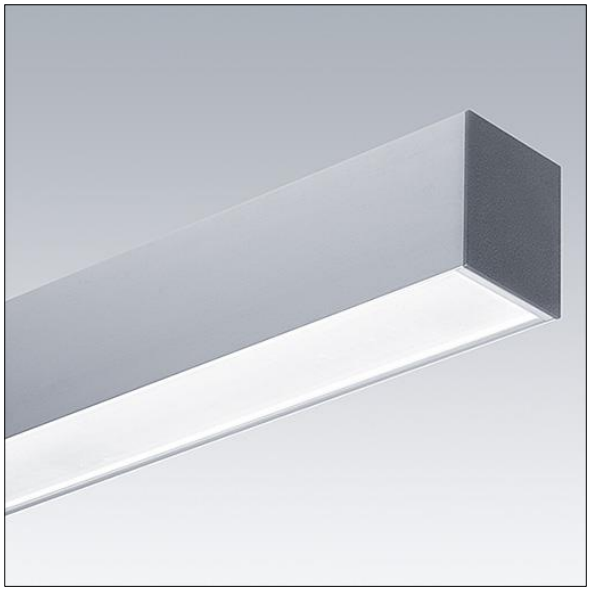

TLG_EQUA_F_MCEMPT.jpg

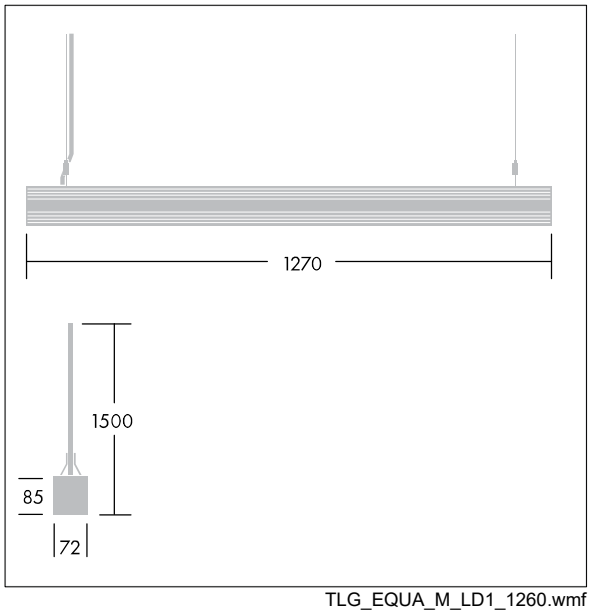

TLG_EQUA_M_LD1_1260.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting