96263072 <CHPK1000PMHGB CHAMPION 1KW PHI WI

ISO 9223 C3	IP66	IK08	⏚	CE

A high performance asymmetrical discharge floodlight for 1 x 1000W Light Source: 1 x HIT-DE / 1000W lamp. magnetic. Class I electrical, IP66 optical and gear compartment, IK08. Body: unpainted die-cast aluminium. Enclosure: 4mm toughened flat glass. Luminaire fixed by single bolt through Ø22mm central hole, or twins bolts through Ø15mm holes at 200mm centres. Cable gland for Ø7.5 to 13mm cable. Aiming via integrated sights. Ideal for sports field and stadium lighting. Complete with ignitor. Supplied complete with IP65 gear box. Complete with Philips lamp.

Luminaire input power: 1051 W
Dimensions: 635 x 674 x 456 mm
Weight: 33.48 kg
Scx: 0.185 m²

TLG_CHMP_F_PDB.jpg

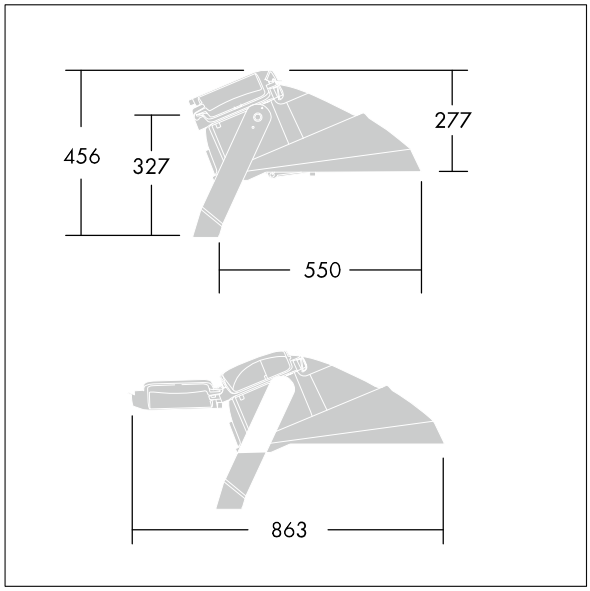

TLG_CHMP_M_U1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting