Discontinued

96551240 <CONTO D 1x35W HF E3 DSB WH L840

IP20		CE	850°C	$T_{a\ 25}^{5}$	

Discontinued

A versatile, surface mounted and suspended luminaire in a sleek, modern design with direct distribution. Electronic, fixed output control gear with 3 hour, manual test, LED emergency lighting circuit for 1 x 35W Light Source: 1 x T16 / 35W lamp(s). Body: extruded aluminium, painted matt white with white trim. Endcaps: moulded polycarbonate painted white. Optic: satinbrite anodised aluminium louvre. Class I electrical, IP20. Electrical connection via piano key terminal block. Self balancing, may be mounted individually or in infinite configurations using connection accessories. Complete with 840 lamp(s).

Dimensions: 1546 x 161 x 49 mm
Luminaire input power: 37.8 W
Weight: 4.9 kg

TLG_CNTR_F_DWSGLDSBE3PDB.jpg

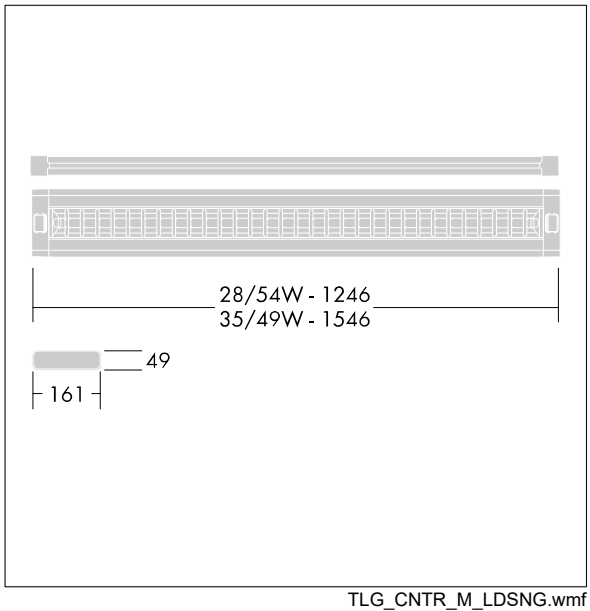

TLG_CNTR_M_LDSNG.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96551240 <CONTO D 1x35W HF E3 DSB WH L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting