# Discontinued

## 96551388 <CONTO DI 2x54W HF E3 DSB WH GY ML4 L840

| IP20 | | CE | 850°C | $T_{a\ 25}^{5}$ | |
|---|---|---|---|---|---|

## Discontinued

A versatile, suspended luminaire in a sleek, modern design with direct/indirect distribution. Electronic, fixed output control gear with 3 hour, manual test, LED emergency lighting circuit for 2 x 54W Light Source: 2 x T16 / 54W lamp(s). Body: extruded aluminium, painted matt white with grey trim. Endcaps: moulded polycarbonate painted grey. Optic: satinbrite anodised aluminium louvre. Class I electrical, IP20. Electrical connection via pre-fitted LSOH white mains cable. Self balancing, may be mounted individually or in infinite configurations using connection accessories. Complete with 840 lamp(s).

Dimensions: 1246 x 236 x 49 mm
Luminaire input power: 120 W
Weight: 4.5 kg

TLG_CNTR_F_DIWGTWINDSBE3PDB.jpg

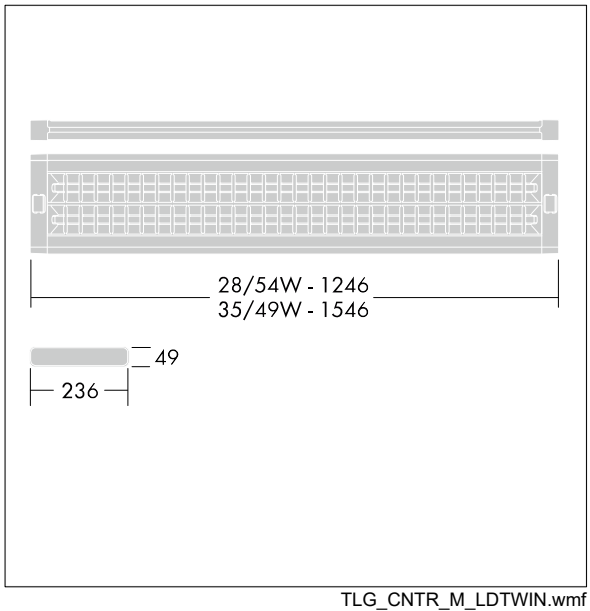


TLG_CNTR_M_LDTWIN.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

# Discontinued

## 96551388 <CONTO DI 2x54W HF E3 DSB WH GY ML4 L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting