Discontinued

96551471 <CONTO D 2850 HFIX E3 MPT GY L840

IP20	IK03		CE	650°C	Ta 0 +25

Discontinued

A versatile, surface mounted and suspended LED luminaire in a sleek, modern design with direct distribution. Electronic, DALI dimmable control gear with 3 hour, manual test, LED emergency lighting circuit. Body: extruded aluminium, anodised silver with grey trim. Endcaps: moulded polycarbonate anodised grey. Optic: micro prism structure acrylic diffuser. Class I electrical, IP20. Electrical connection via piano key terminal block. May be mounted individually or in infinite configurations using connection accessories. Complete with 4000K LED

Dimensions: 1246 x 236 x 54 mm
Luminaire input power: 34.8 W
Weight: 5.8 kg

TLG_CNTR_F_DGTWINMPTE3PDB.jpg

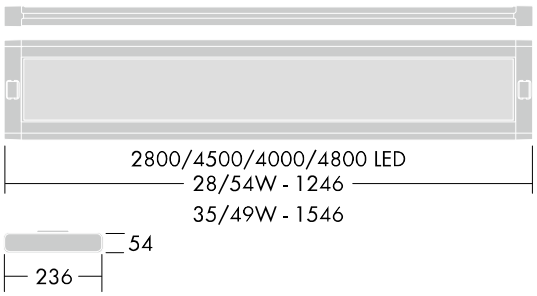

TLG_CNTR_M_LDTWINMPT.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96551471 <CONTO D 2850 HFIX E3 MPT GY L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting