Contrast 2 LED

96263255 <CONT2 S 4L70 GN S/S 44x12° NG

ISO 9223 C3	IP66	IK08			T_a-50

Contrast 2 LED

A compact architectural LED Bracket mounted with 44 x 12° vertical light distribution. Class II electrical, IP66, IK08. Body and Frame: aluminium die casting alloy, sanded silver grey 150. Glass: tempered 4mm thick. Gasket: EPDM. Complete with green LED

Requires connection box and power supply for up to 4 monochromatic luminaires (96261898/96261899).

Dimensions: 185 x 117 x 62 mm
Luminaire input power: 10.1 W
Weight: 0.77 kg

TLG_CONL_F_S12X12PDB.jpg

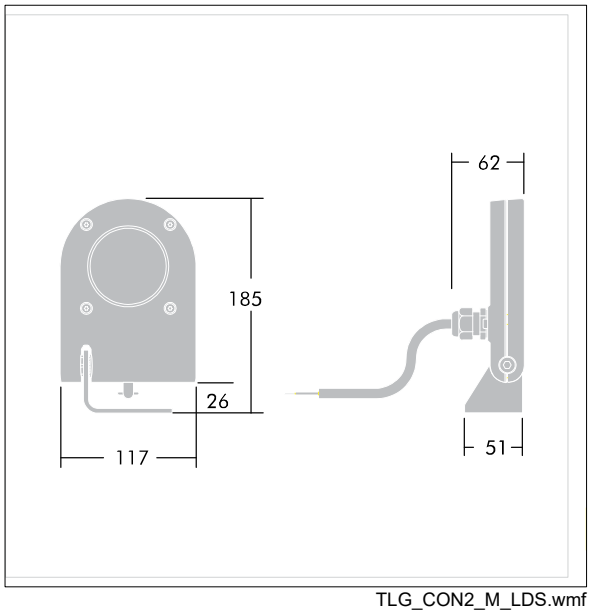

TLG_CON2_M_LDS.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Contrast 2 LED

96263255 <CONT2 S 4L70 GN S/S 44x12° NG

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting