Dyana

96264406 <DYANA LED 60L70 NR 740 BP CL1 MA76

IP66 | IK10

Dyana

A high quality LED luminaire with narrow road light distribution and Electronic, Programmable control gear. With power reduction function. Body, canopy and spigot: die-cast aluminium, textured dark grey finish. Enclosure: 5mm thick, toughened glass. Class I electrical, IP66. IK10. Supplied, ready to install, in a single box. Complete with 4000K LED

Mounting: Ø76mm post-top with 5° or 10° tilt, or side entry with 0° or -5° tilt.

Dimensions: 595 x 511 x 234 mm
Luminaire input power: 125 W
Weight: 12.2 kg
Scx: 0.039 m²

TLG_DYNA_F_LEDMTPPDB.jpg

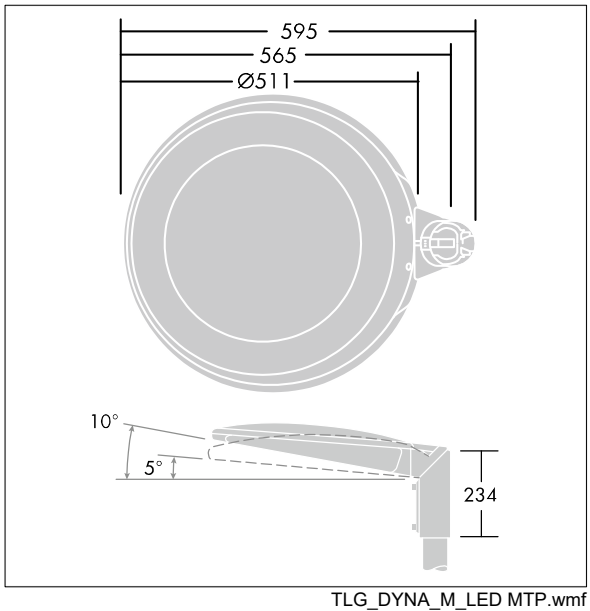

TLG_DYNA_M_LED MTP.wmf

This product contains light sources of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Dyana

96264406 <DYANA LED 60L70 NR 740 BP CL1 MA76

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting