Discontinued

96265580 OXANE S 24L35 BP WS GL 740 CL1

ISO 9223 C3	IP66	IK08		CE

Discontinued

A high efficiency LED road lighting luminaire with wide street distribution. Body and spigot in die-cast aluminium, powder coated textured light grey (close to RAL 9006), shallow toughened glass enclosure. Class I electrical, IP66. Post top (Ø60/76mm x 80mm long spigot, tilted to 5°) or lateral (Ø34/42/49/60mm x 120mm long spigot, tilted to 0°) mounting. Equipped with stand alone stepdim with cycle of 8 hours at 50%. Complete with 4000K LED

Dimensions: 591 x 286 x 170 mm
Luminaire input power: 28 W
Weight: 6.74 kg
Scx: 0.061 m²

TLG_OXAN_F_LEDMTPESHPDB.jpg

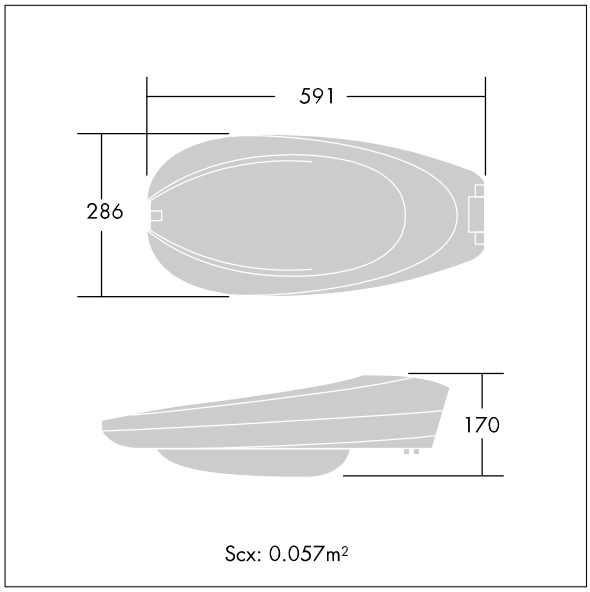

TLG_OXAN_M_LDSESH.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96265580 OXANE S 24L35 BP WS GL 740 CL1

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting