Discontinued

96269125 AREA2 84L35 A/CB L740 CL1

IP66 | IK08 | CE

Discontinued

A highly efficient, general purpose, LED area floodlight. Electronic, fixed output control gear driving 84 LEDs at 350mA with asymmetrical distribution. IP66, IK08, Class I electrical. Body: recyclable, die-cast aluminium (AS12U, EN AC-47100) powder coated dark grey. Enclosure: 5mm thick toughened glass. Integrated visor for precise lighting control. Reversable mounting stirrup supplied, optional spigot adaptors available separately for post top mounting. Complete with 4000K LED.

Ta rating shown is indicative and may change according to mounting position, please see installation instructions for further details.

Dimensions: 636 x 494 x 270 mm
Luminaire input power: 89 W
Weight: 19.23 kg
Scx: 0.087 m²

TLG_AFLD_F_2LED84PDB.jpg

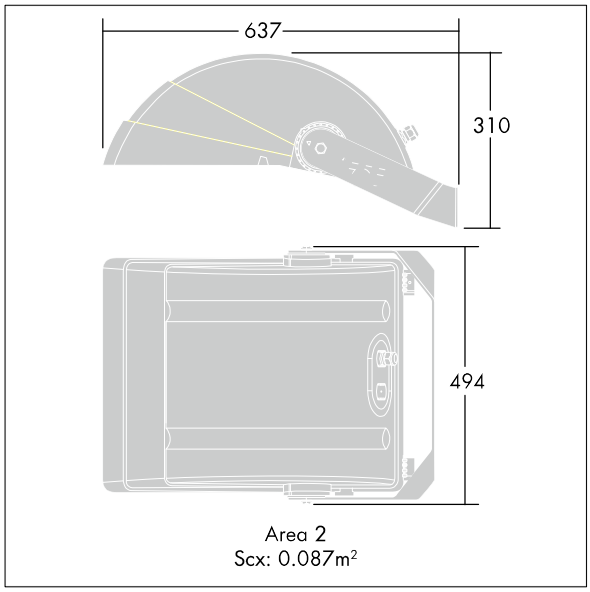

TLG_AFLD_M_LD2b.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%.
Unless stated otherwise, the values apply to an ambient temperature of 25°C.
The failure of 8 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting