96268099 <SATIN2 MWA L1230 48L35 A/S 830 KIT

IP67	IK08		CE	850°C	T_a50

A discreet linear floodlight for façade illumination applications. 48 LEDs driven at 350mA with asymmetrical distribution. Remote, Electronic, fixed output control gear making the product suitable for operation in ambient temperatures of up to 50°C. Body: extruded aluminium (EN AW-6060 T6) painted textured silver grey. Sides: grey polycarbonate. Enclosure: UV stabilised polycarbonate. Stirrups: powder coated steel. Class II electrical (this product is not earthed), IP67, IK08. Surface mounted or recessed with optional ground recessed box. Pre-wired with 1m of 2x1mm² H05RNF cable (or 1m of 5x1mm² Profiplast cable for RGBW versions) at one end. Complete with 3000K LED

Dimensions: 1232 x 75 x 70 mm
Luminaire input power: 46 W
Luminaire luminous flux: 4296 lm
Luminaire efficacy: 93 lm/W
Weight: 4.9 kg

TLG_SAT2_F_LEDS.jpg

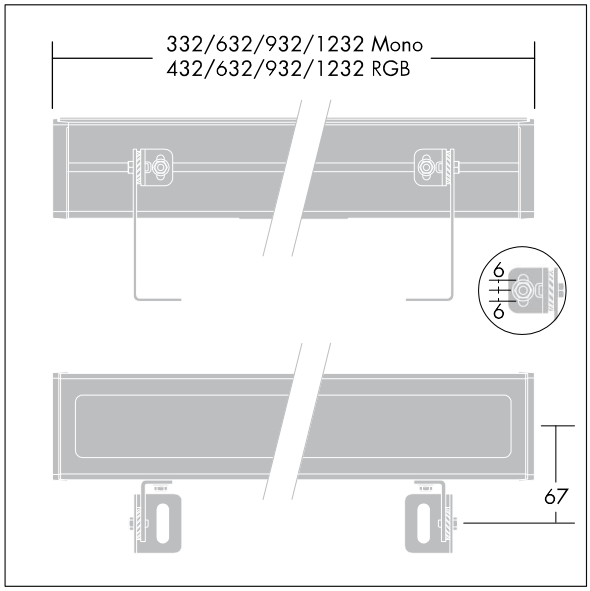

TLG_SAT2_M_LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96268099 <SATIN2 MWA L1230 48L35 A/S 830 KIT

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting