Omega Pro

96627429 <OMEGA PRO 3150 HF E3 3X12 LED830

$T_{p(b)}$		IP20 IP40	IK03		CE	650 °C	T_a 0 +25	

Omega Pro

A recessed/surface/suspended edge lit LED luminaire with a slim 19mm profile. Electronic, with 3 hour, manual test, LED emergency lighting circuit. Class I electrical, IP40 from below, IP40_IP20 from above, IK03. Body: steel sheet white (RAL9016). Diffuser: UV-stabilised, Glare ProTech prismatic optic. Electrical connection via push wire terminal blocks, loop in/loop out possible. Complete with 3000K LED

Dimensions: 1197 x 297 x 17 mm
Luminaire input power: 36 W
Luminaire luminous flux: 2830 lm
Luminaire efficacy: 79 lm/W
Weight: 7.4 kg

TLG_OMPL_F_pers.jpg

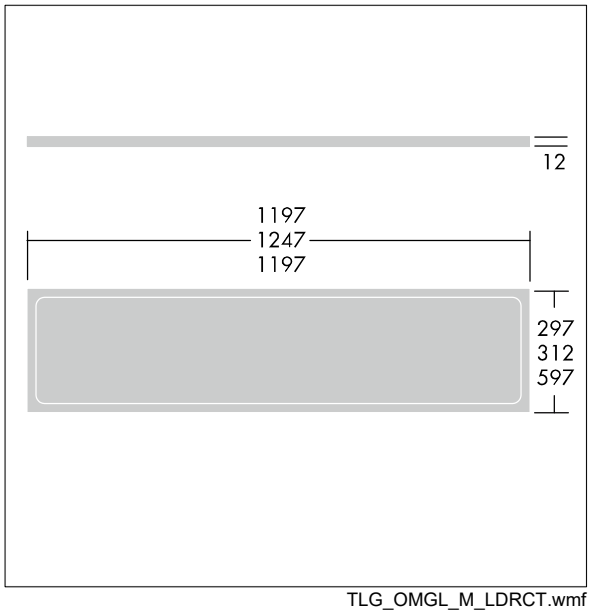

TLG_OMGL_M_LDRCT.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting