92900125 <FORCELED 4000 E3 RF L840

IP66 | halogen | IK10 | 850 °C | Ta 0 +35

A compact IP66, dust and moisture proof LED luminaire. electronic - fixed output fixed output control gear with 3 hour, manual test, emergency lighting circuit. Class I electrical, IK10. Canopy: fully recyclable aluminium painted. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. With radio frequency module (Slave). Complete with 4000K LED.

TLG_FORL_F_PDBUNLIT.jpg

Dimensions: 735 x 180 x 95 mm
Luminaire input power: 34 W
Luminaire luminous flux: 4150 lm
Luminaire efficacy: 122 lm/W
Weight: 2.4 kg

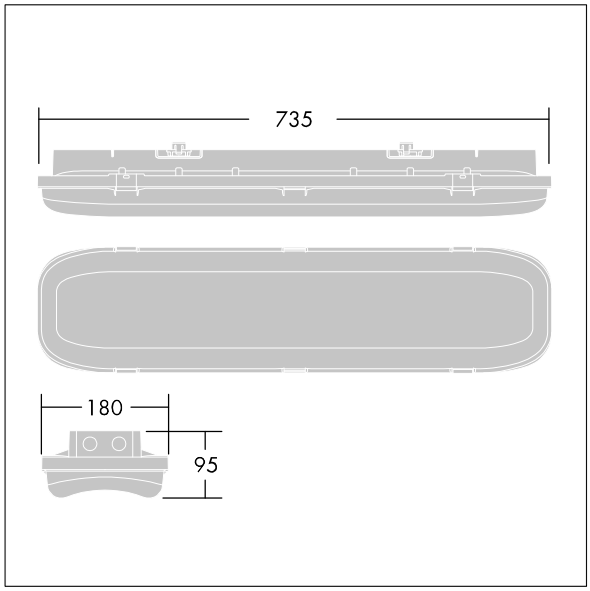

TLG_FORL_M_LED.wmf

This product contains light sources of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

92900125 <FORCELED 4000 E3 RF L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting