Discontinued

96627703 <CHAL 150 LED1200-840 HF RSB

IP20 IP54 | IK03 | 850°C | T_a25

Discontinued

A recessed LED downlight. Remote fixed output control gear. IP54 (IP20 from above), Class II electrical (this product is not earthed). Body: aluminium, painted white (RAL 9016). Reflector: satinbrite. Suitable for mounting in ceiling thicknesses of 1-40mm in a Ø150mm cut-out. Complete with 4000K LED.

Dimensions: Ø172 x 94 mm
Luminaire input power: 13.3 W
Luminaire luminous flux: 1200 lm
Luminaire efficacy: 90 lm/W
Weight: 0.46 kg

TLG_CHLC_F_PDB.jpg

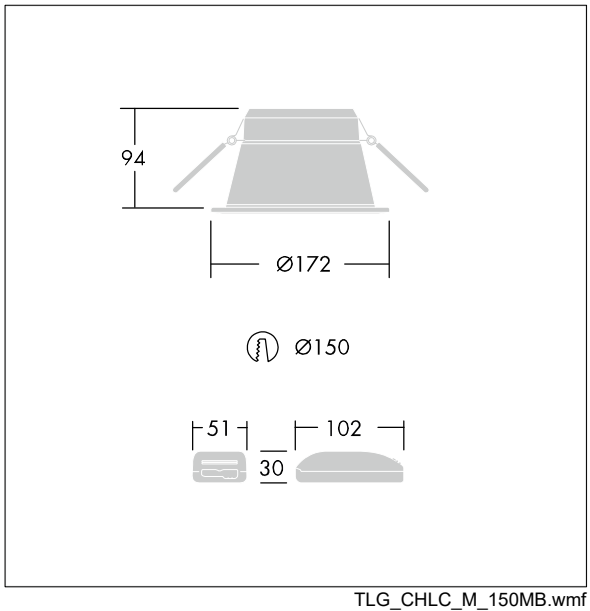

TLG_CHLC_M_150MB.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96627703 <CHAL 150 LED1200-840 HF RSB

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting