THORN

96642705 <NOVALINE LED3500-840 MWS E3 WH

IP40	IK02		CE			850°C	Ta 0 +25	

A round bulkhead LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body and bezel: finish, spun aluminium. Diffuser: opal polycarbonate. Class I electrical, IP40. With integral motion sensor for on/off control. Complete with 4000K LED.

Dimensions: Ø455 x 105 mm
Luminaire input power: 32.5 W
Luminaire luminous flux: 3500 lm
Luminaire efficacy: 108 lm/W
Weight: 2.53 kg

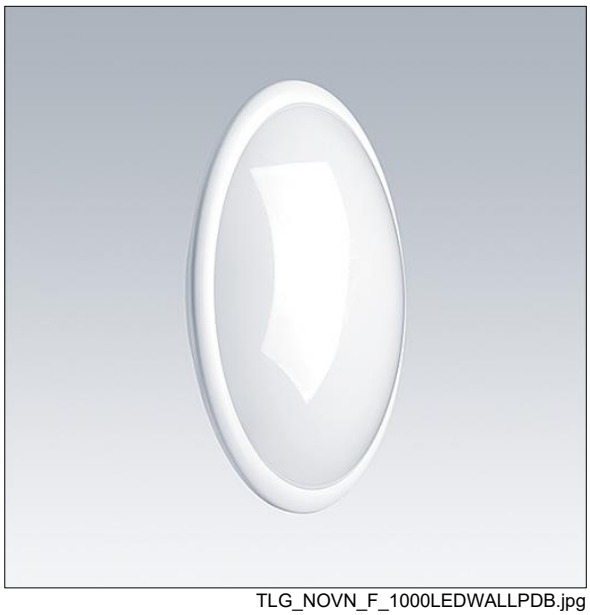

TLG_NOVN_F_1000LEDWALLPDB.jpg

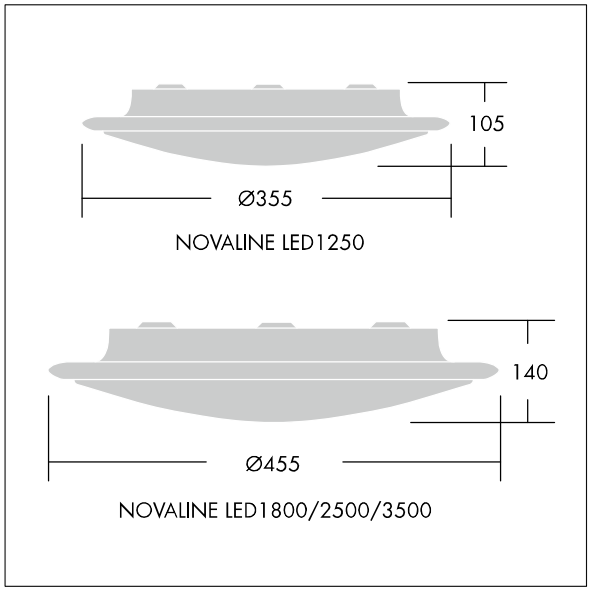

TLG_NOVN_M_LED2.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

96642705 <NOVALINE LED3500-840 MWS E3 WH

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting