E/Fact

96271567 <EFACT R00 1L35 ACC 7D BLU AL SF

IP67 | IK08

E/Fact

A small round ground recessed luminaire. 1 LED(s) driven at 350mA by integral driver, 7° beam angle for walkover guidance applications. Body: die-cast aluminium with powdered paint finish. Frame: painted aluminium, 2mm thick. Front glass: semi-frosted toughened sodic glass, 8mm thick, surface temperature complies with EN60598-2-13. Recessing box:. Rated IP67, class I electrical. Maximum static load 1000kg. Complete with blue LED

Dimensions: Ø85 x 117 mm
Luminaire input power: 3 W
Luminaire luminous flux: 23 lm
Luminaire efficacy: 8 lm/W
Weight: 0.64 kg

TLG_EFCT_F_R001LEDALSF.jpg

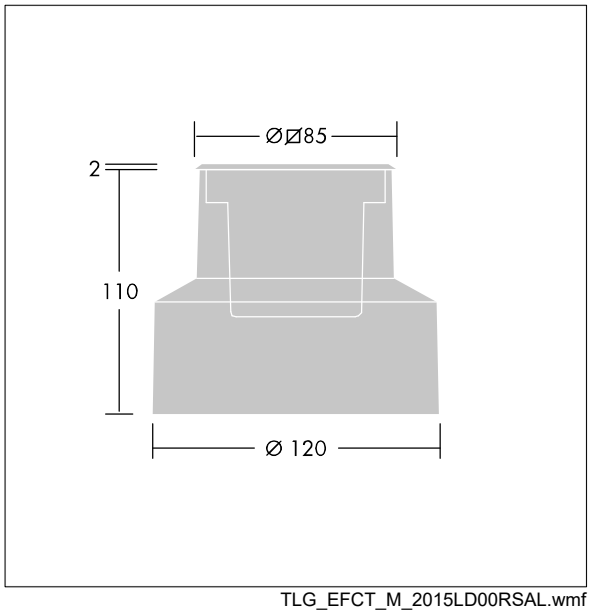

TLG_EFCT_M_2015LD00RSAL.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting