E/Fact

96271591 <EFACT C0 3L50 ACC 9D 840 AL SF

IP67 | IK09

E/Fact

A small square ground recessed luminaire. 3 LED(s) driven at 500mA by integral driver, 9° beam angle for walkover guidance applications. Tilting angle adjustment of ±22°. Body: die-cast aluminium with powdered paint finish. Frame: painted aluminium, 2mm thick. Front glass: semi-frosted toughened sodic glass, 8mm thick, surface temperature complies with EN60598-2-13. Recessing box: polypropylene. Rated IP67, class I electrical. Maximum static load 1000kg. Complete with 4000K LED

Dimensions: 120 x 120 x 126 mm
Luminaire input power: 6 W
Luminaire luminous flux: 346 lm
Luminaire efficacy: 58 lm/W
Weight: 1.51 kg

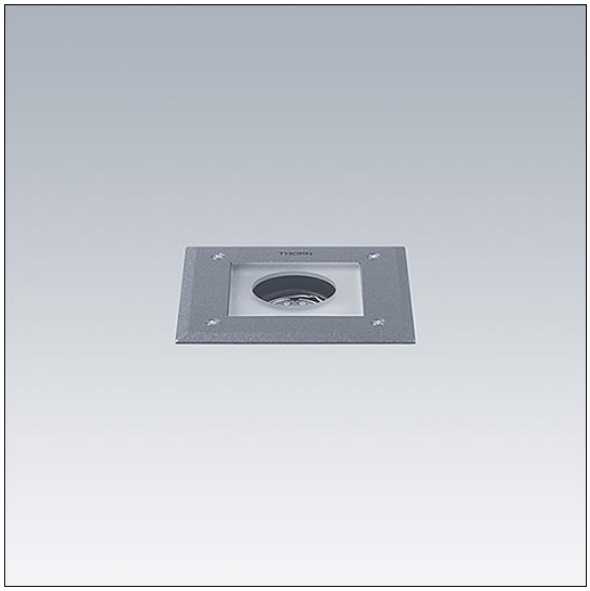

TLG_EFCT_F_C03LEDALSF.jpg

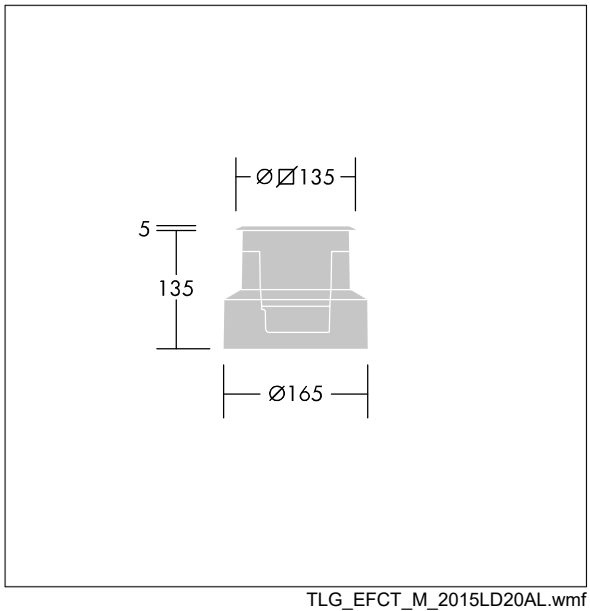

TLG_EFCT_M_2015LD20AL.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting