96642773 LYRIC DECO LED1050-830 HF MSU OP

IP20

A stylish, curving tubular suspended LED luminaire with fixed output control gear. Class I electrical, IP20. Diffuser: opal glass. Complete with 3000K LED.

Dimensions: Ø200 x 300 mm
Luminaire input power: 18 W
Luminaire luminous flux: 1050 lm
Luminaire efficacy: 58 lm/W
Weight: 2.2 kg

TLG_LYRD_F_SUSPPDB.jpg

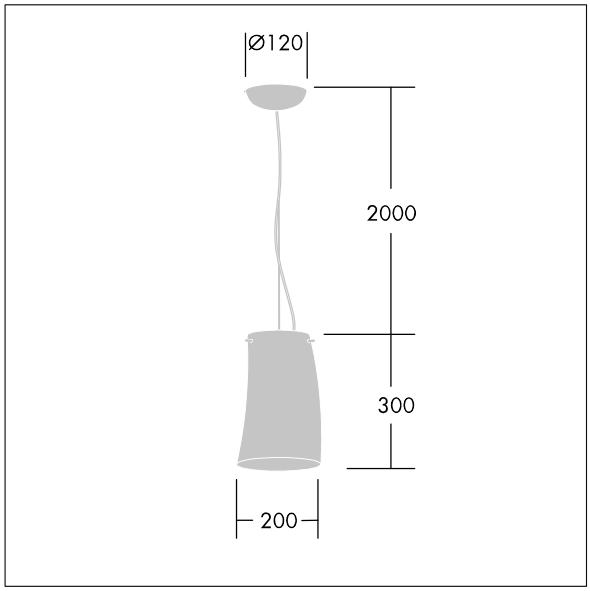

TLG_LYRD_M_SOSP.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting