Discontinued

96627648 <OMEGA LED 3900-830 HF Q597

$T_{p(b)}$			IP20 IP44		CE	650 °C	T_a25	

Discontinued

A recessed/surface/suspended LED luminaire with a slim 12mm profile. Electronic, fixed output control gear. Class II electrical, IP44 from below, IP44_IP20 from above, IK02. Body: steel sheet, white (RAL9016). Diffuser: UV-stabilized opal acrylic. Electrical connection via push wire terminal blocks, loop in/loop out possible. Complete with 3000K LED

Dimensions: 597 x 597 x 12 mm
Luminaire input power: 41 W
Luminaire luminous flux: 3750 lm
Luminaire efficacy: 91 lm/W
Weight: 5.1 kg

TLG_OMGL_F_SLIM.jpg

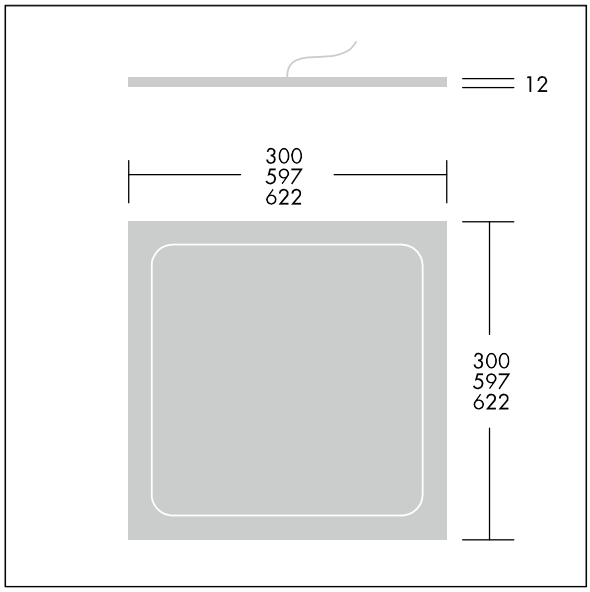

TLG_OMGL_M_LDSQ.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96627648 <OMEGA LED 3900-830 HF Q597

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting