96628152 <NOVALINE LED2500-830 COR MWS RF WH

IP40 | IK02 | 850°C | T_a -20 +25

A round bulkhead LED luminaire. Electronic, corridor function control gear. Body and bezel: finish, spun aluminium. Diffuser: opal polycarbonate. Class I electrical, IP40. With integral motion sensor for corridor function control and radio frequency module (Master). Complete with 3000K LED.

Dimensions: Ø455 x 105 mm
Luminaire input power: 18.2 W
Luminaire luminous flux: 2250 lm
Luminaire efficacy: 124 lm/W
Weight: 2.33 kg

TLG_NOVN_F_1000LEDWALLPDB.jpg

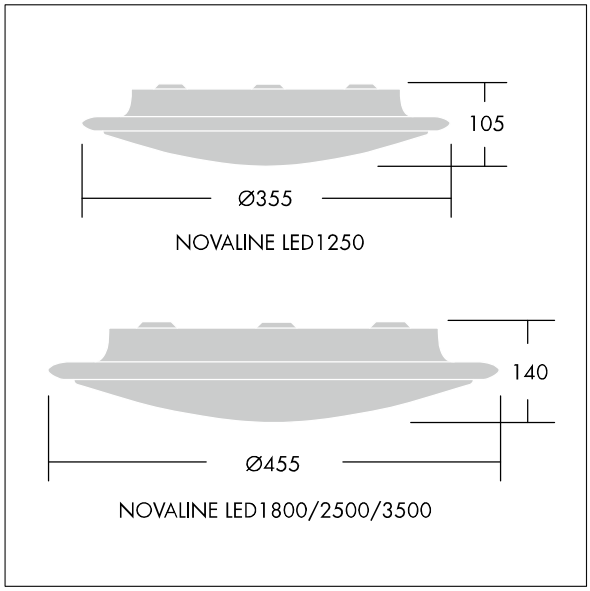

TLG_NOVN_M_LED2.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96628152 <NOVALINE LED2500-830 COR MWS RF WH

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting