




## Punch II T5

**A range of surface mounted or suspended luminaires, combining T16 (T5) direct lighting with louvres for high light output**

- Smooth, rounded body design gives unobtrusive appearance
- Excellent optical performance with LOR up to 74%
- Surface luminaires can also be suspended for suspended direct illumination
- High frequency dimming versions available



*Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.*

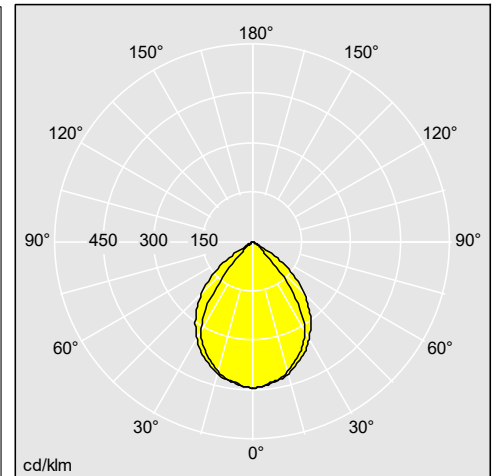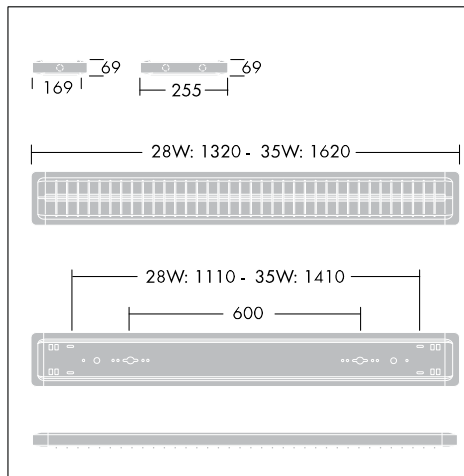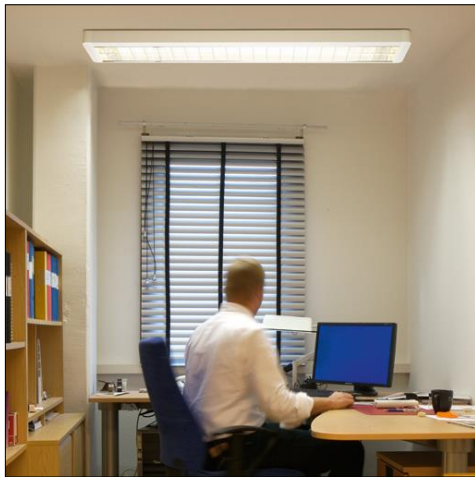

96504450

### Material/Finish

Body: sheet steel painted white (close to RAL9010)  
End cap: moulded in white polycarbonate  
Louvres: aluminium anodised.

### Installation/Mounting

Electrical installation via piano-key terminal blocks, two cable entry points at centre of fitting. Clips retain the louvre to enable hinging for easy lamp replacement and maintain earth continuity. Surface versions mounted with spacers via keyholes and C-washers. Single/twin surface and DI versions can be suspended via optional wire suspension kits (to be ordered separately), close offset rod or pendant rod kits. Continuous line mounting of luminaires via optional connect kit.

UK: BESA accessory kit available for mounting onto BESA box.

### Specification

To specify state:

Surface mounted fluorescent luminaire in single/twin/quad T16(T5) lamp 14/28/35W versions with high frequency / high frequency dimmable / emergency gear

As Thorn Punch II T5